

EPSA

YALITIM • YAPI KİMYASALLARI

2024 Product Catalogue



QUADROFLEX
powerfull solutions

- Waterproofing Products
- Primers Ceramic Adhesives and Joint Fillers
- Exterior Wall Products
- Repair and Reinforcement Materials
- Flooring Systems
- Mortar Additives
- Accessories

ABOUT US





The Innovative Brand of the Construction Chemicals Sector

Quadro Flex

EPSA, the leading organization in the sector, strengthens its power with **QUADROFLEX**, bringing high-tech, solution-oriented quality products to its customers in Turkey.

With an integrated production facility established on 35,000 m², including POWDER, RESIN, and LIQUID PRODUCTION LINES, it has secured its place in the sector and contributed to the national economy. With its expert staff, it offers solutions tailored to the needs of every customer, making it a pioneering organization in the sector it serves.

Our priority is to maintain high-quality standards in our products and continuously raise these standards. In this way, not only current demands but also future expectations can be met from today.

The three components that make up the name **QUADROFLEX** are **High Quality, Strong Technical Infrastructure, Always Reliable, and Solution-Oriented.**



VISION

In the construction chemicals sector, we have set our vision not only to be a player but also to be a driving force leading the sector's transformation. We aim to create more effective, energy-efficient, and aesthetically satisfying structures through continuous research and development. By adopting an approach based on innovation and sustainability, we focus on adding value to the sector and society, inspiring our employees, and guiding the industry.

MISSION

As QUADROFLEX, we set out with the mission of strengthening the foundation of buildings, supporting sustainability, and offering environmentally friendly solutions through innovation. We commit to producing customized products that meet the technical needs of the sector, bringing the construction industry together with durable and aesthetic structures. By bringing together reliability, quality, and environmental awareness, we aim to create a more livable environment for future generations and spread this light, born from Turkey, to the world.

INDEX

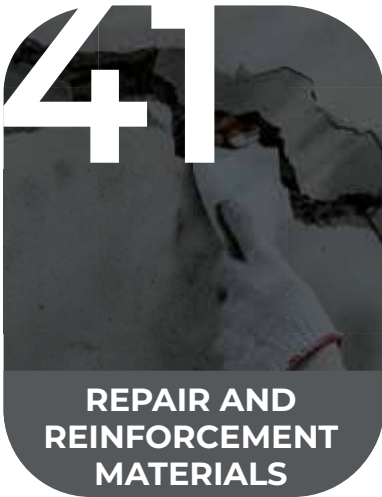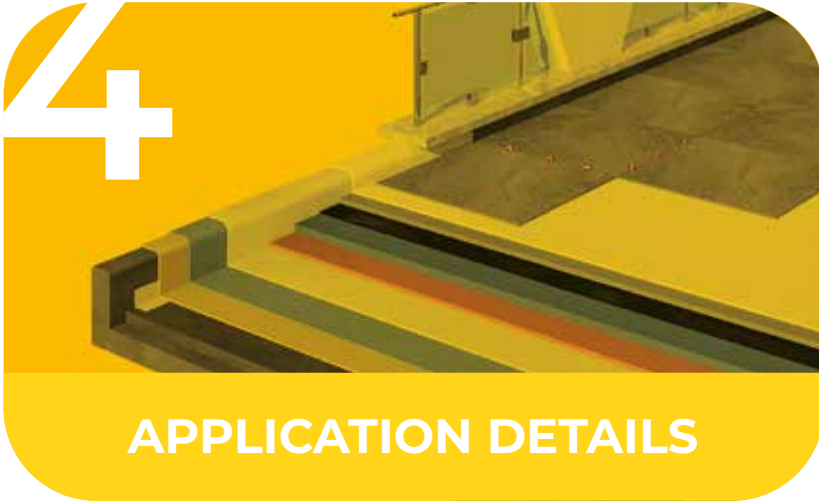




APPLICATION DETAILS

This section includes the most commonly applied application details. These details can be expanded or modified according to the specific application.

For detailed information, please contact our technical team.

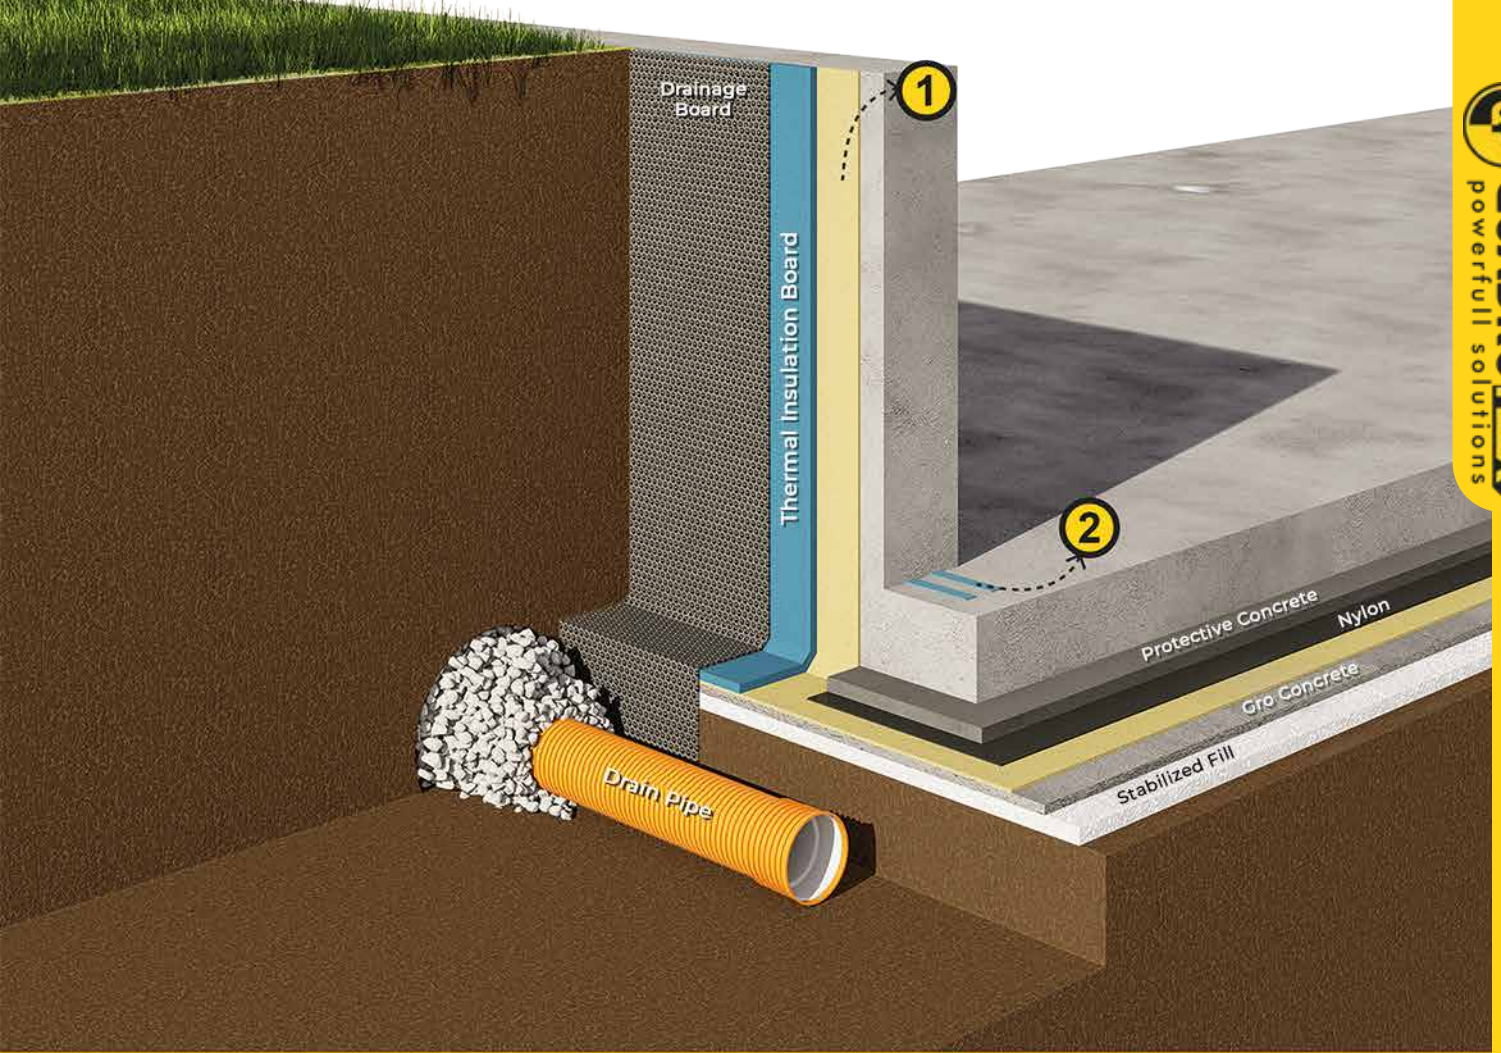

FOUNDATION WALL DETAIL

1

<p>QUADRO BITUMFLEX 1K BF 20</p>  <p>P 20</p>	<p>QUADRO BITUMFLEX 1K BF 22</p>  <p>P 20</p>	<p>QUADRO BITUMFLEX 2K BF 24</p>  <p>P 21</p>	<p>QUADRO BITUMFLEX 2K BF 25</p>  <p>P 21</p>	<p>QUADRO BITUMFLEX 2K BF 30</p>  <p>P 22</p>
<p>QUADRO BITUM S 1K BS 40</p>  <p>P 22</p>	<p>QUADRO BITUM 2K BP 50</p>  <p>P 23</p>	<p>QUADRO PUR BITUM 2K BP 52</p>  <p>P 24</p>	<p>QUADRO PUR BITUM 1K BP 55</p>  <p>P 24</p>	

2

QUADRO EXPANDING SX20
EB 5520




P 83




WET AREA DETAIL

1 QUADRO CERAD 2 S CA 235  P 76	QUADRO CERAD 2 SW CA 235 W  P 77	2 QUADRO JOINT F JF 950  P 80	3 QUADRO SEAL PS 600  P 40	4 QUADRO FLX CF 300  P 27		
					QUADRO CERAD 2S2 CA 240  P 77	QUADRO CERAD 2 S2 W CA 240 W  P 78
5 QUADRO PAH BAND PB 5500  P 84			QUADRO FIX BAND FB 5560  P 84		QUADRO ULTRA BANT UB 5500  P 85	QUADRO S LASTIC CS 320  P 28

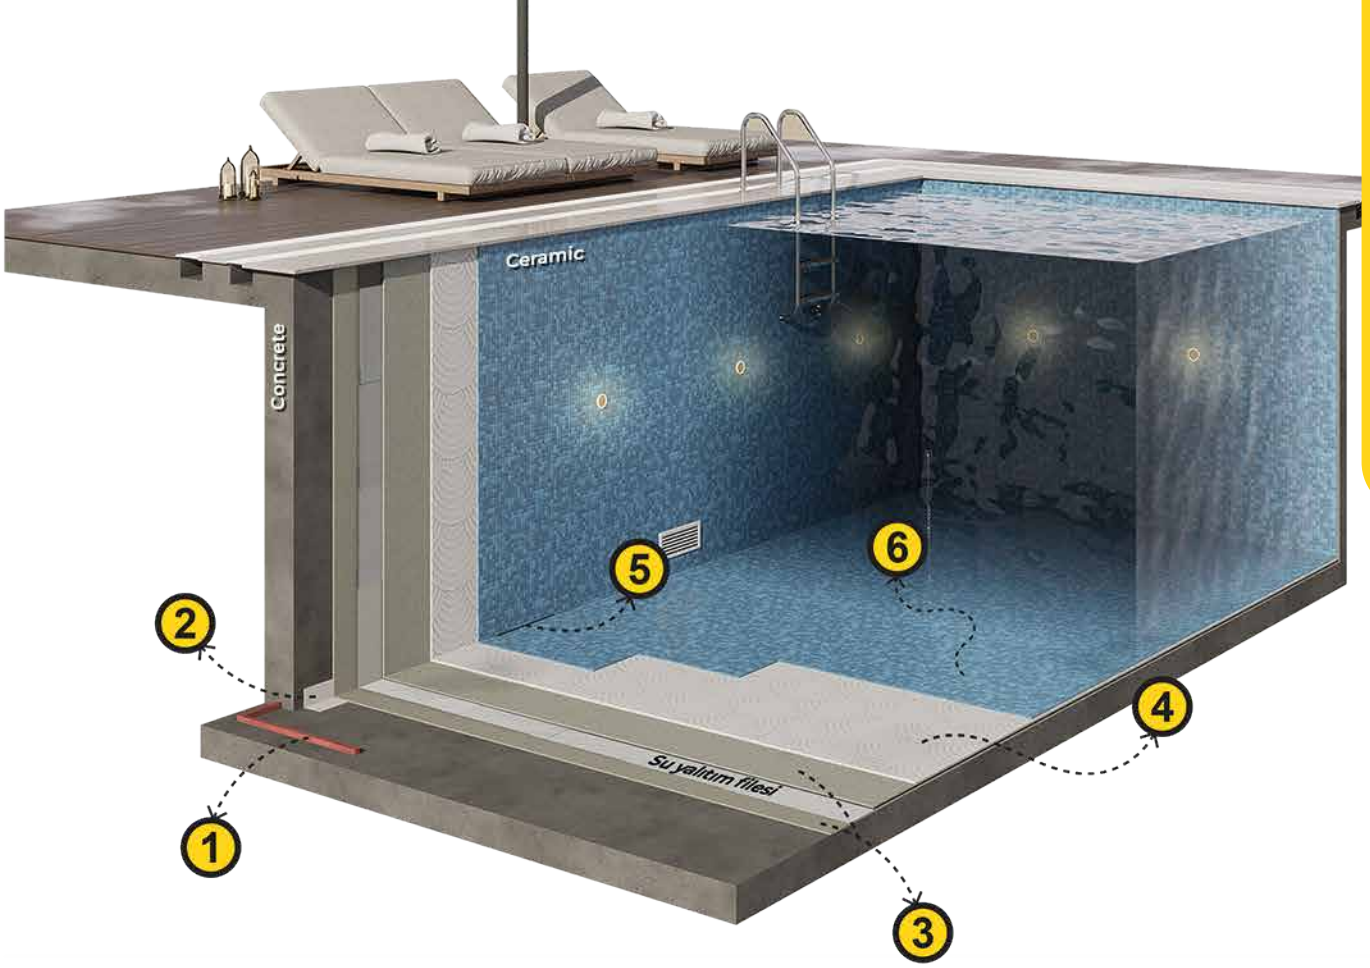

POOL DETAIL



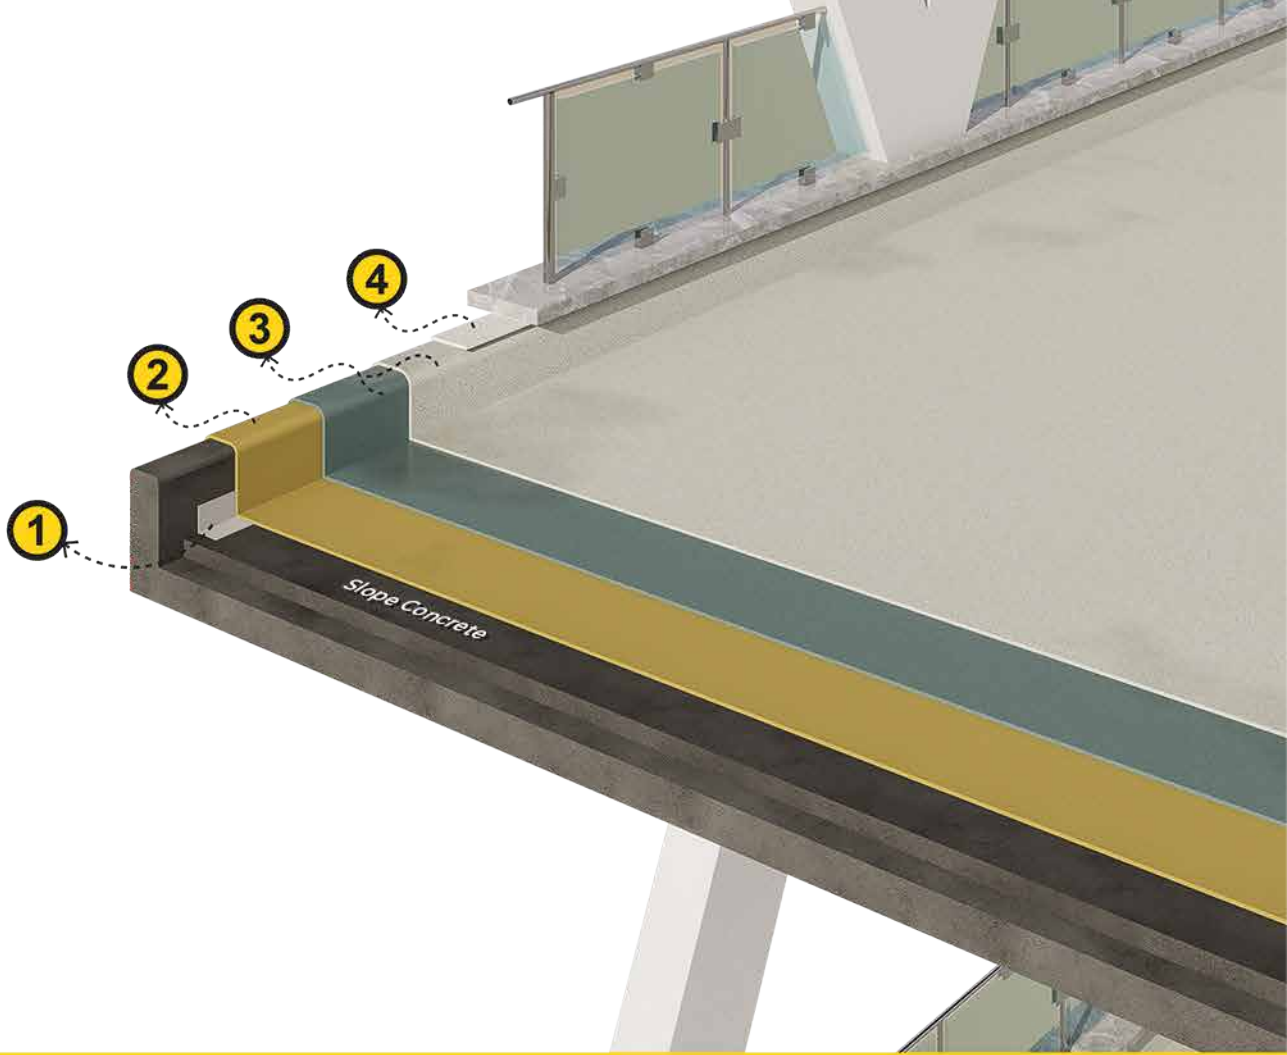

UV-RESISTANT WALKABLE TERRACE DETAIL


<p>1</p> <p>QUADRO PAH BAND PB 5500</p>  <p>P 84</p>	<p>QUADRO FIX BAND FB 5560</p>  <p>P 84</p>	<p>QUADRO ULTRA BANT UB 5500</p>  <p>P 85</p>	<p>2</p> <p>QUADRO PUR PR RP 405</p>  <p>P 34</p>	
<p>3</p> <p>QUADRO PUR 1K UV RP 415</p>  <p>P 33</p>	<p>QUADRO PUREA UV CP 421</p>  <p>P 36</p>	<p>4</p> <p>QUADRO CERAD 2 S CA 235</p>  <p>P 76</p>		<p>QUADRO CERAD 2 SW CA 235 W</p>  <p>P 77</p>

1

QUADRO PAH BAND
PB 5500
P 84

QUADRO FIX BAND
FB 5560
P 84

QUADRO ULTRA BANT
UB 5500
P 85

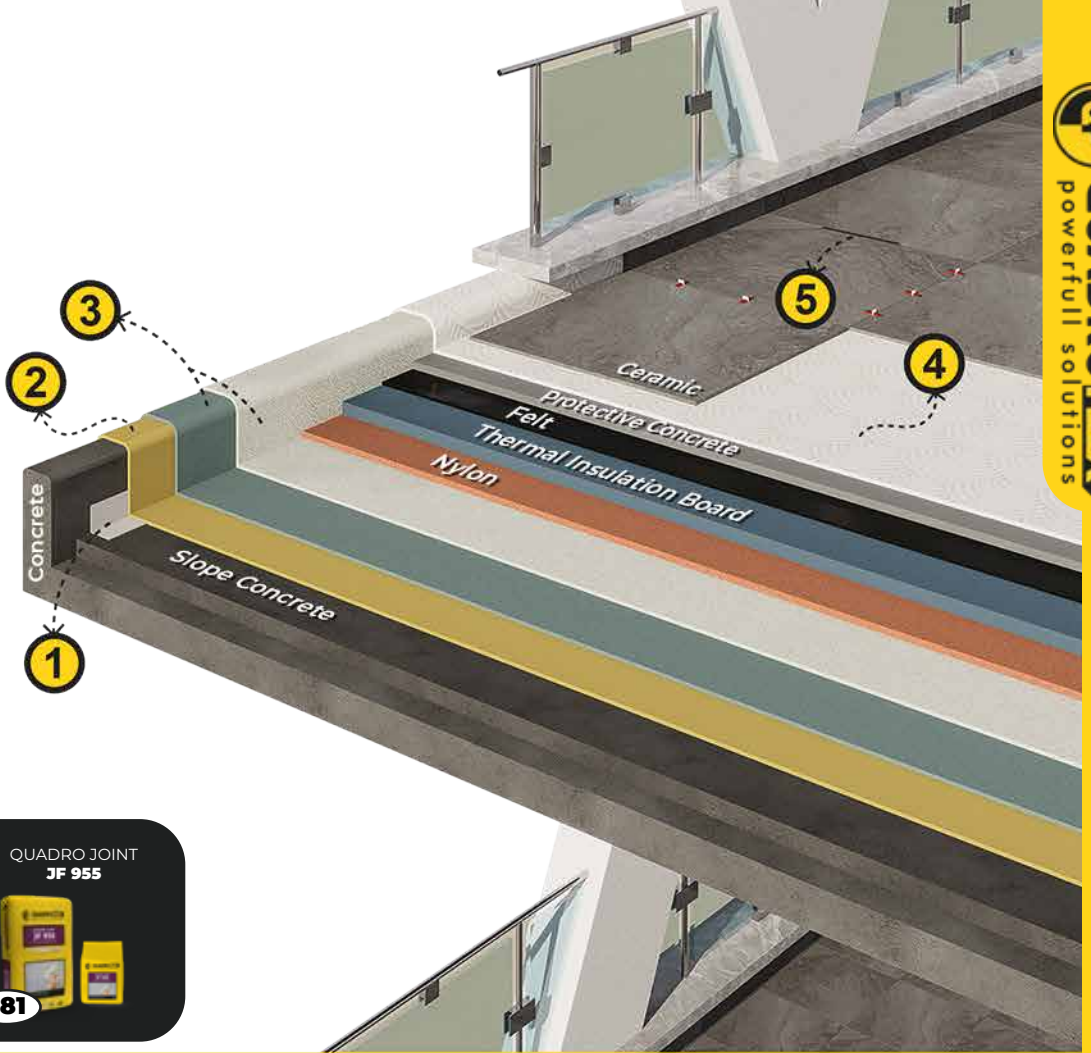

5

QUADRO JOINT F
JF 950
P 80

QUADRO JOINT
JF 955
P 81

WALKABLE TERRACE DETAIL

2

QUADRO EP PRIMER
EP 941
P 68

QUADRO BITUM 2K
EP 940
P 68

QUADRO PUR PR
RP 405
P 34

QUADROBITUM PR
BS 10
P 23

4

QUADRO CERAD 2 S
CA 235
P 76

QUADRO CERAD 2 SW
CA 235 W
P 77

QUADRO CERAD 2S2
CA 240
P 77

QUADRO CERAD 2 S2 W
CA 240 W
P 78

3

QUADRO BITUMFLEX 1K
BF 20
P 20

QUADRO BITUMFLEX 1K
BF 22
P 20

QUADRO BITUMFLEX 2K
BF 24
P 21

QUADRO BITUMFLEX 2K
BF 25
P 21


QUADRO BITUMFLEX 2K
BF 30
P 22

QUADRO S LASTIC
CS 320
P 28

QUADRO PUR BITUM 1K
RP 410
P 33

QUADRO FAST 2K
CF 350
P 29

QUADRO PUREA
CP 420
P 35

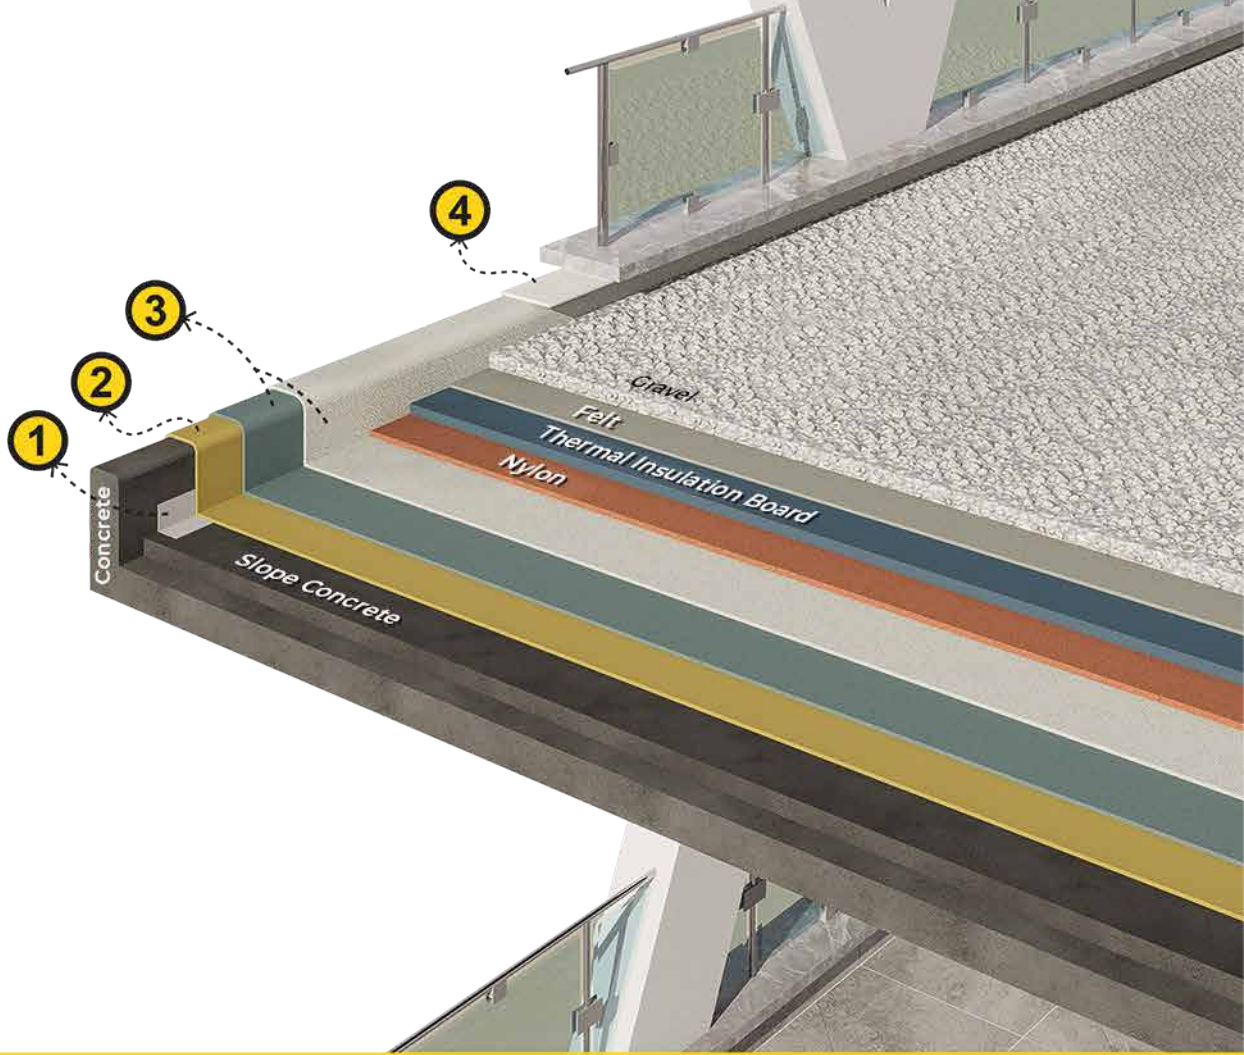

WALKABLE TERRACE DETAIL

1

QUADRO PAH BAND
PB 5500



P 84

QUADRO FIX BAND
FB 5560



P 84

QUADRO ULTRA BANT
UB 5500



P 85

2

QUADRO EP PRIMER
EP 941



P 68

QUADRO BITUM 2K
EP 940



P 68

QUADRO PUR PR
RP 405



P 34

QUADROBITUM PR
BS 10



P 23

3

QUADRO BITUMFLEX 1K
BF 20



P 20

QUADRO BITUMFLEX 1K
BF 22



P 20

QUADRO BITUMFLEX 2K
BF 24



P 21

QUADRO BITUMFLEX 2K
BF 25



P 21

QUADRO BITUMFLEX 2K
BF 30



P 22

QUADRO S LASTIC
CS 320



P 28

QUADRO PUR 1K
RP 410



P 33

QUADRO FAST 2K
CF 350



P 29

4

QUADRO CERAD 2 S
CA 235




P 76

QUADRO CERAD 2 SW
CA 235 W



P 77

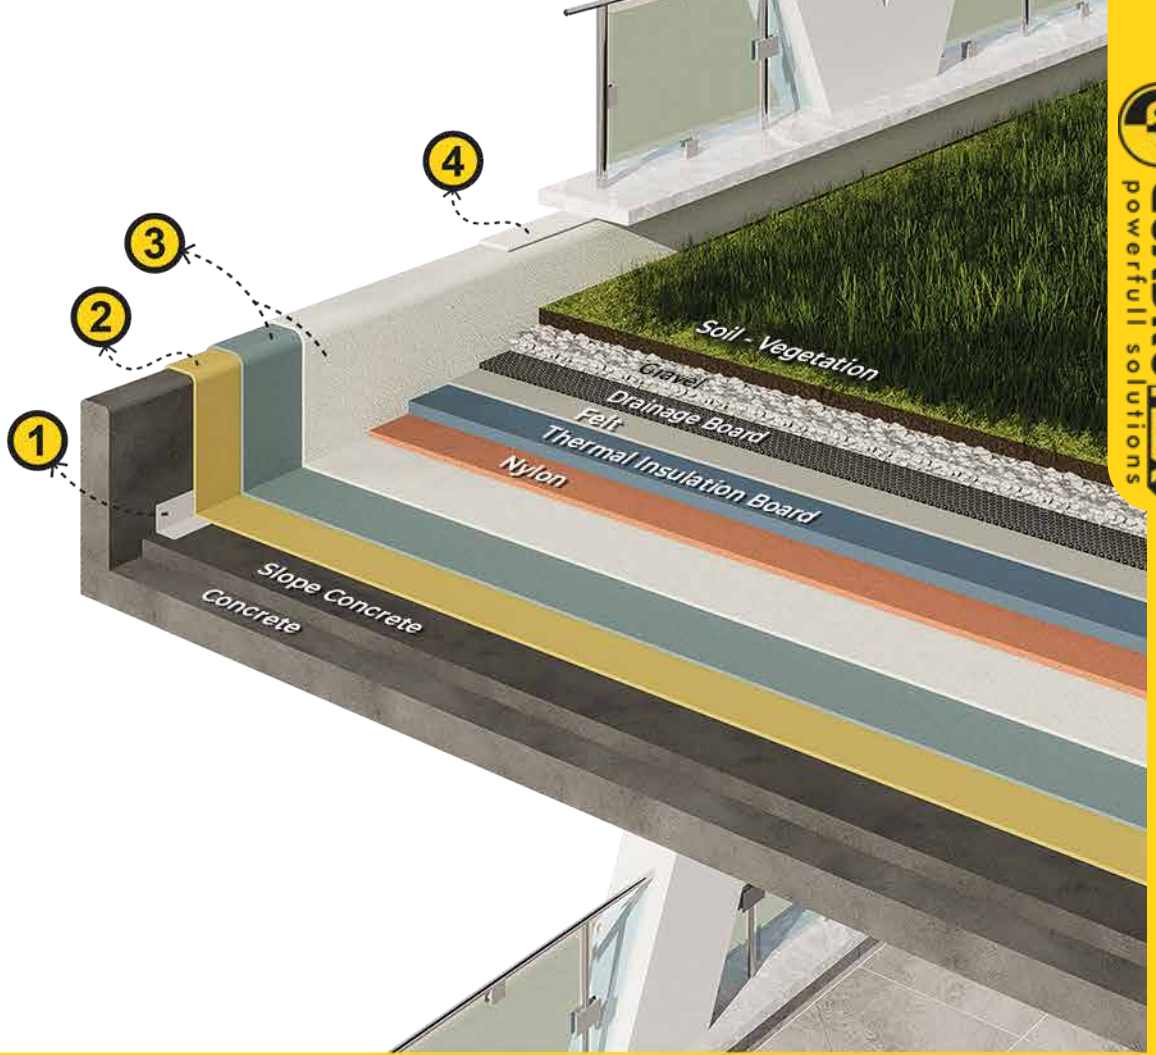

GARDEN TERRACE DETAIL

1

<p>QUADRO PAH BAND PB 5500</p>  <p>P 84</p>	<p>QUADRO FIX BAND FB 5560</p>  <p>P 84</p>	<p>QUADRO ULTRA BANT UB 5500</p>  <p>P 85</p>
---	---	---

2


<p>QUADRO EP PRIMER EP 941</p>  <p>P 68</p>	<p>QUADRO BITUM 2K EP 940</p>  <p>P 68</p>
<p>QUADRO PUR PR RP 405</p>  <p>P 34</p>	<p>QUADROBITUM PR BS 10</p>  <p>P 23</p>

3





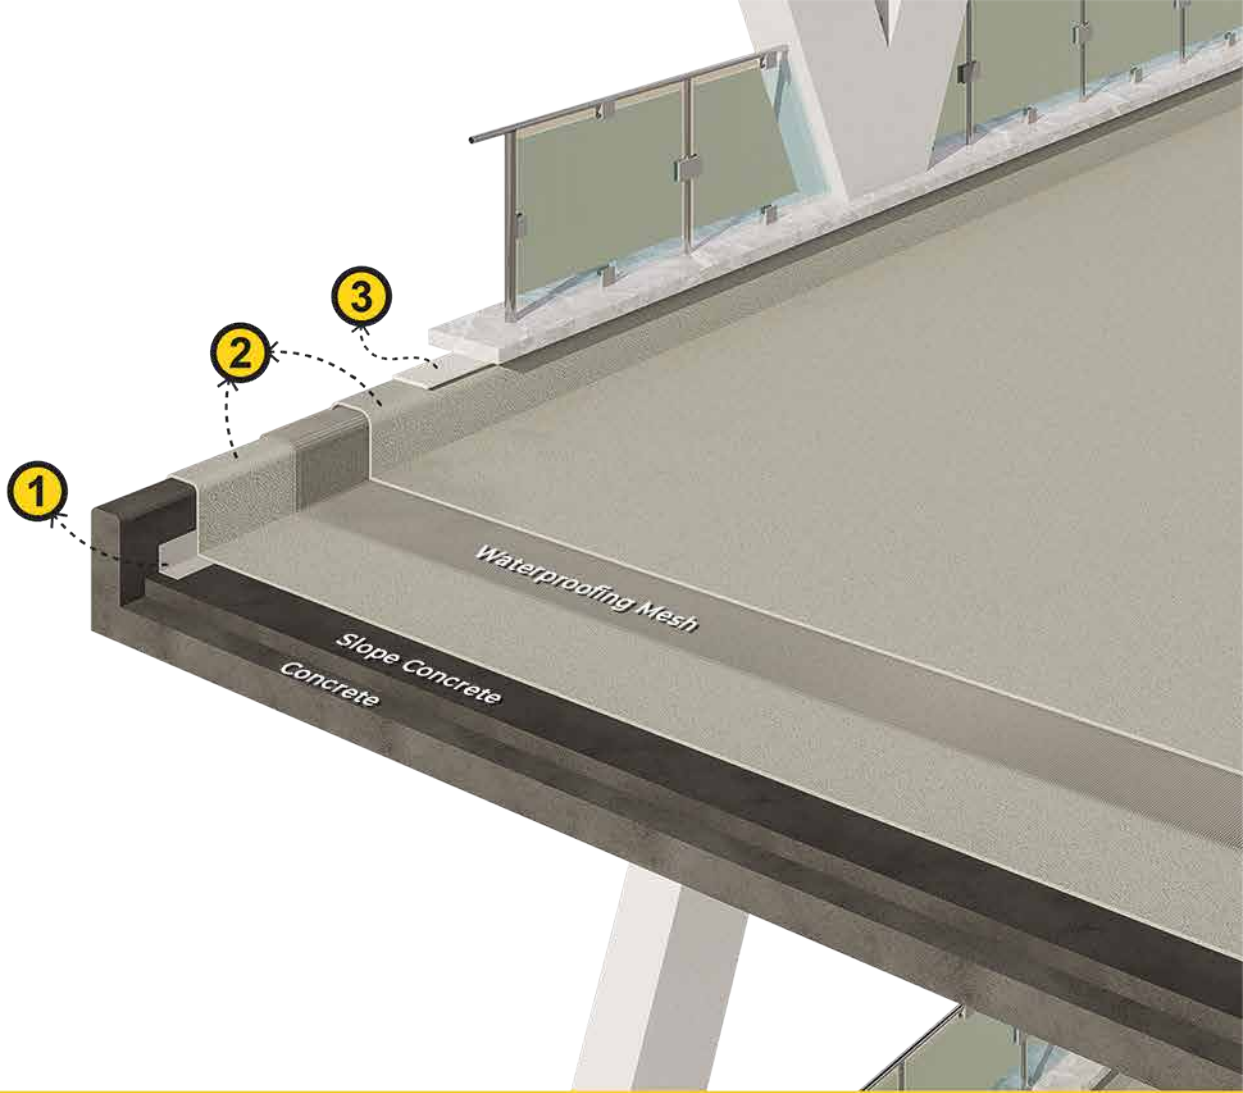

<p>QUADRO BITUM S 1K BS 40</p>  <p>P 22</p>	<p>QUADRO PUR BITUM 2K BP 50</p>  <p>P 23</p>	<p>QUADRO PUR BITUM 2K BP 52</p>  <p>P 24</p>	<p>QUADRO PUR BITUM 1K BP 55</p>  <p>P 24</p>
<p>QUADRO S LASTIC CS 320</p>  <p>P 28</p>	<p>QUADRO PUR 1K RP 410</p>  <p>P 33</p>	<p>QUADRO PUREA CP 420</p>  <p>P 35</p>	


4

<p>QUADRO CERAD 2 S CA 235</p>  <p>P 76</p>	<p>QUADRO CERAD 2 SW CA 235 W</p>  <p>P 77</p>
---	--



UV-RESISTANT WALKABLE TERRACE DETAIL

<p>1</p> <p>QUADRO PAH BAND PB 5500</p>  <p>P 84</p>	<p>QUADRO FIX BAND FB 5560</p>  <p>P 84</p>	<p>QUADRO ULTRA BANT UB 5500</p>  <p>P 85</p>	<p>2</p> <p>QUADRO S LASTIC W CS 325</p>  <p>P 29</p>
<p>4</p> <p>QUADRO CERAD 2 S CA 235</p>  <p>P 76</p>	<p>QUADRO CERAD 2 SW CA 235 W</p>  <p>P 77</p>		

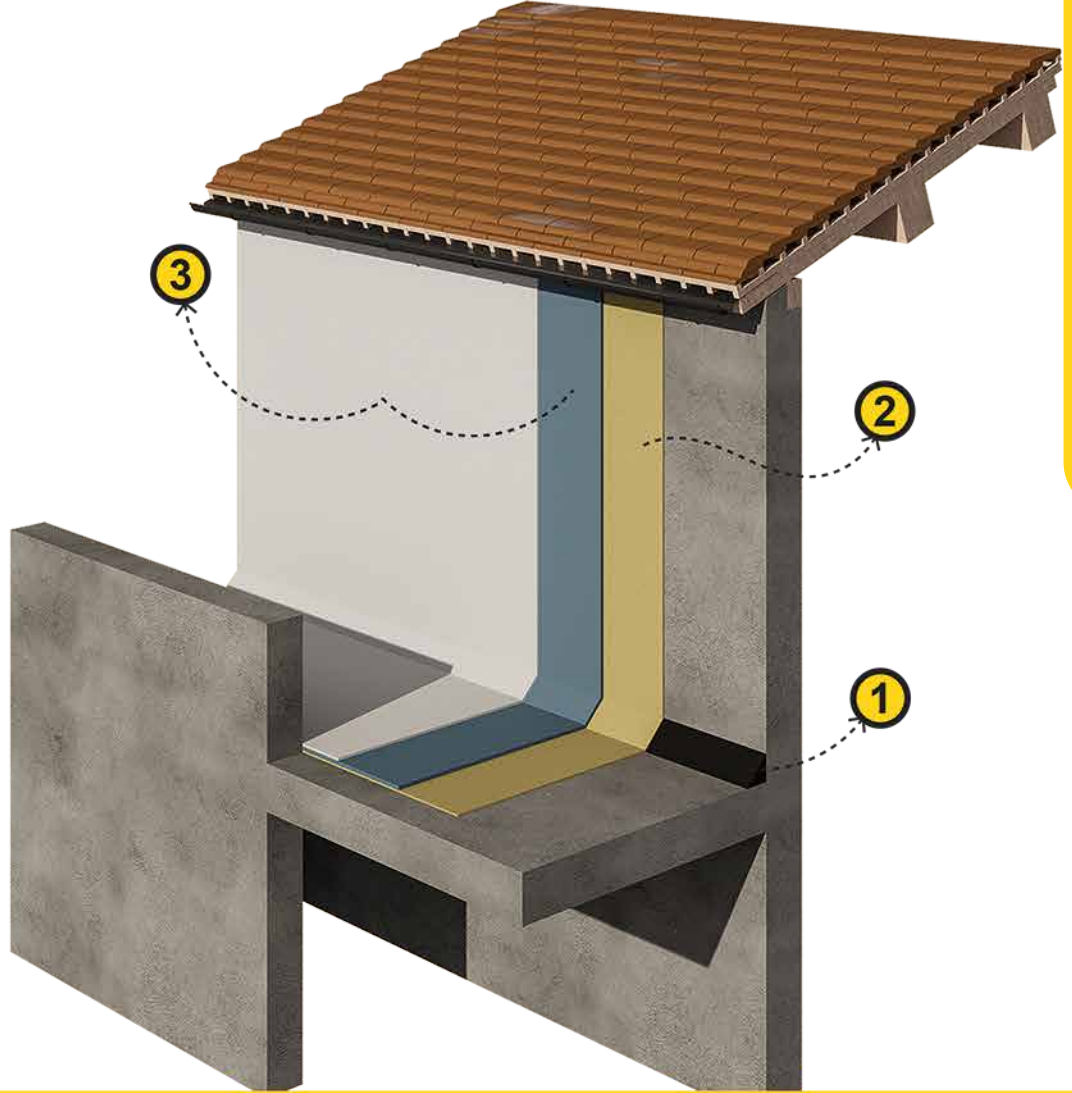

ROOF GUTTER DETAIL




1

QUADRO MORTAR
CM 780



P 46

2

QUADRO EP PRIMER EP 940	QUADRO EP PRIMER EP 941	QUADRO PUR PR RP 405
		
P 68	P 68	P 34

3

QUADRO WHITE
RA 401




P 32

QUADRO PUR 1K UV
RP 415




P 33

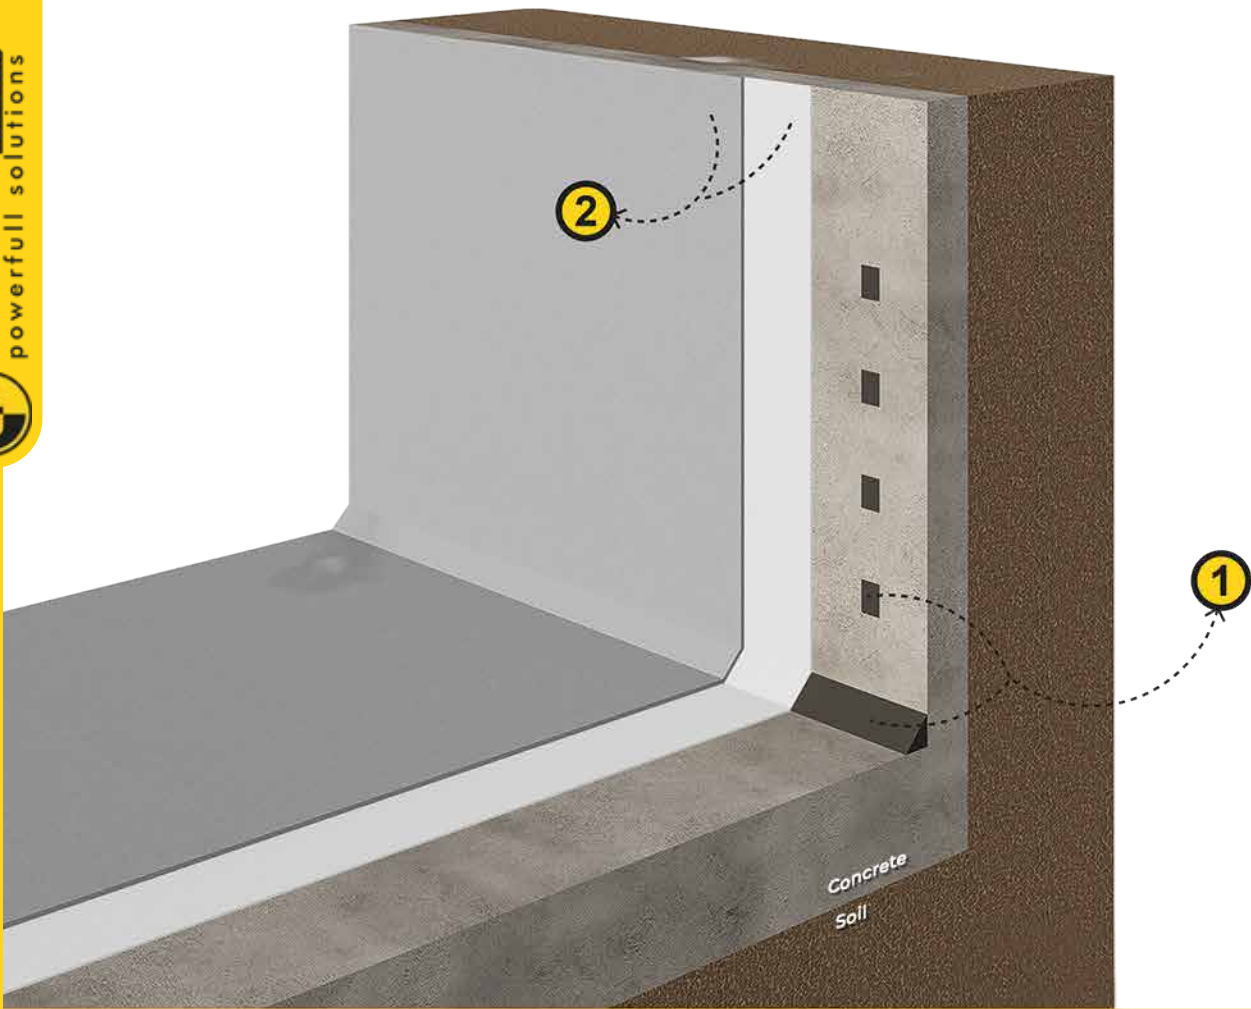




NEGATIVE WATERPROOFING DETAIL

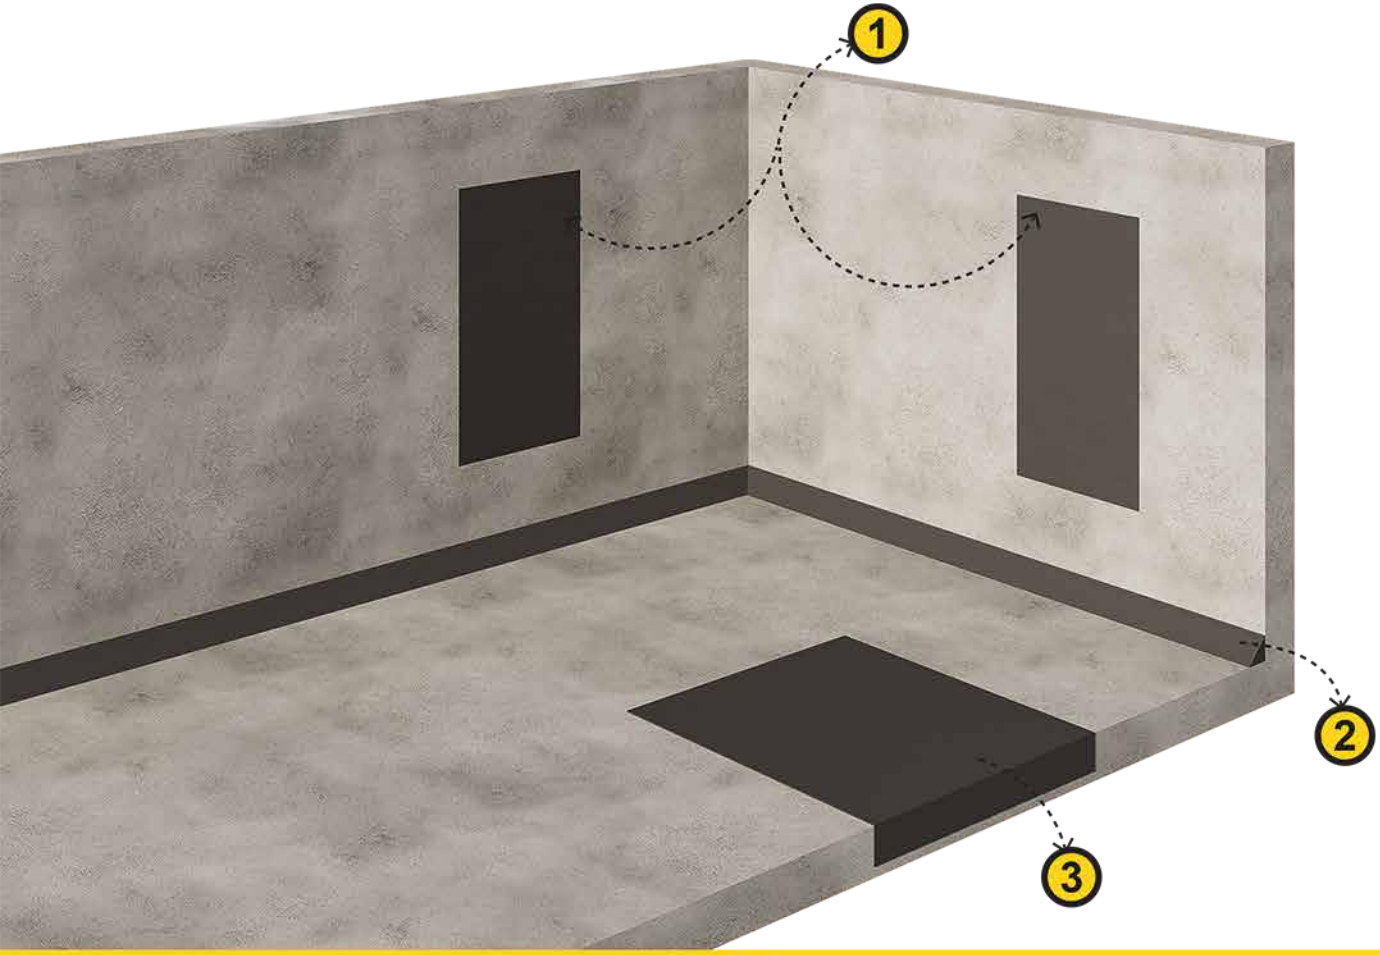




REPAIR DETAIL

<p>1</p>	<p>2</p>	<p>3</p>
<p>QUADRO MORTAR CM 780</p>  <p>p 46</p>	<p>QUADRO MORTAR T CB 785</p>  <p>p 46</p>	<p>QUADRO MORTAR CM 780</p>  <p>p 46</p>
<p>QUADRO EPOXY MULTI EM 777</p>  <p>p 43</p>	<p>QUADRO EPOXY MORTAR EM 700</p>  <p>p 44</p>	<p>QUADRO EPOXY GROUT EG 710</p>  <p>p 44</p>
		<p>QUADRO GROUT CG 720</p>  <p>p 45</p>
		<p>QUADRO CONCRETE 25 CO 725</p>  <p>p 47</p>

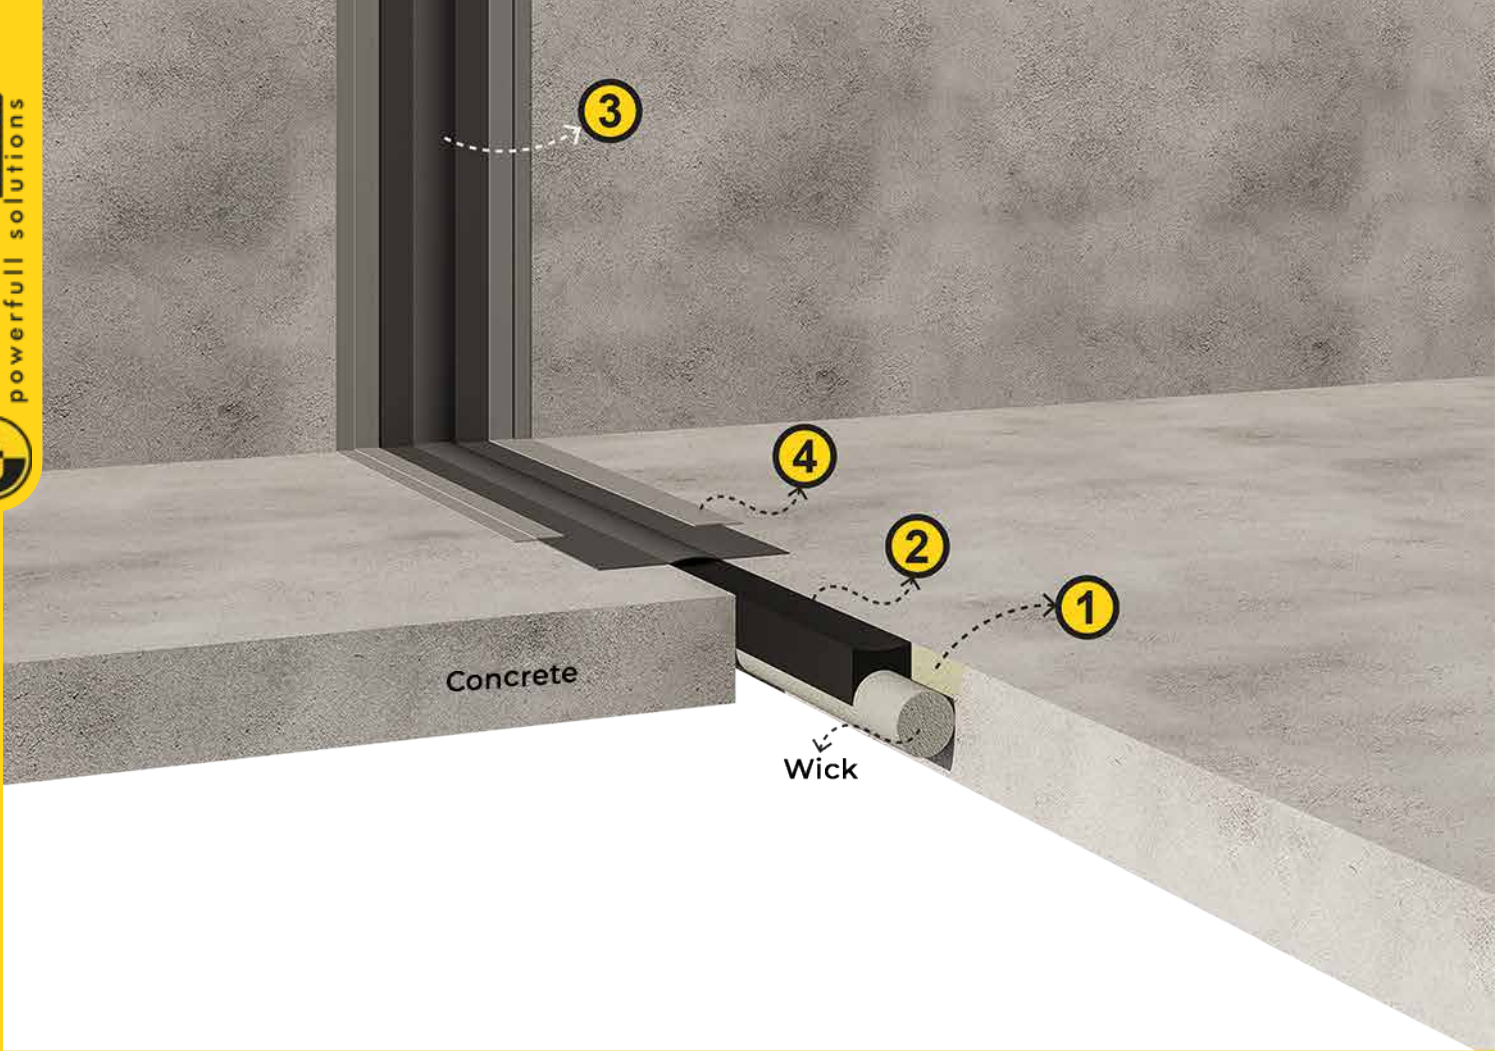

EXPANSION JOINT DETAIL

<p>1</p> <p>QUADRO SEAL PS 600</p>  <p>P 40</p>	<p>QUADRO SEAL W PS 605</p>  <p>P 40</p>	<p>QUADRO PRO SEAL 2K PS 610</p>  <p>P 40</p>	<p>2</p> <p>QUADRO PUR PR RP 405</p>  <p>P 34</p>
<p>3</p> <p>QUADRO DILETASTON 200 DB 5200</p>  <p>P 83</p>	<p>4</p> <p>QUADRO EPOXY FIX EM 785</p>  <p>P 43</p>		<p>QUADRO EPOXY MULTI EM 777</p>  <p>P 43</p>

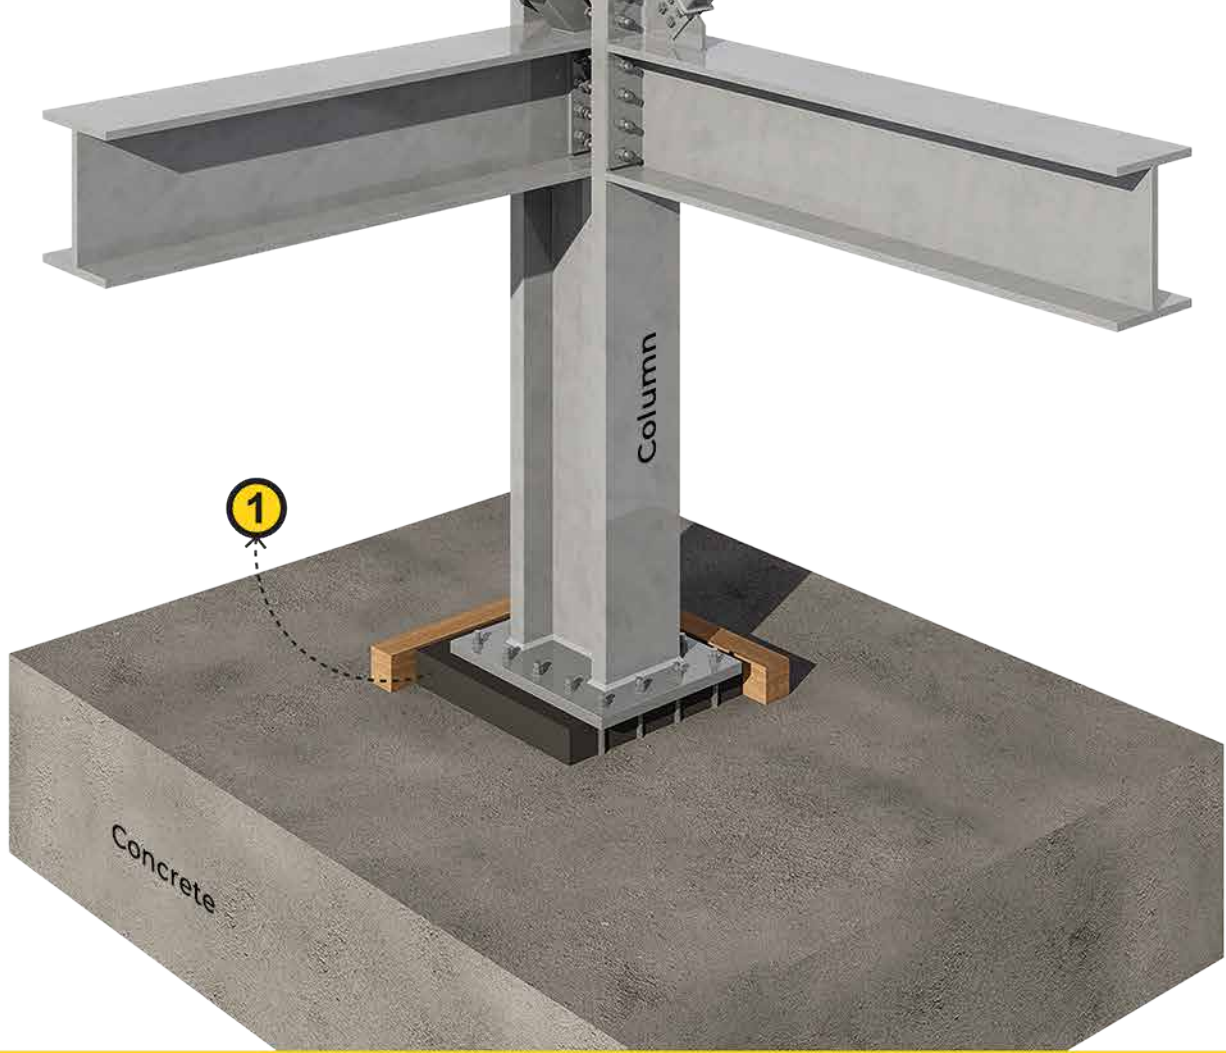

GROUT DETAIL





WATERPROOFING PRODUCTS

BITUMEN-BASED
CEMENT-BASED
RESIN-BASED
MEMBRANE SYSTEMS
MASTICS



BITUMEN-BASED

WATERPROOFING PRODUCTS

BF 20 | **BF 24** | **BF 30** | **BS 10** | **BP 52**

BF 22 | **BF 25** | **BS 40** | **BP 50** | **BP 55**

QUADRO BITUMFLEX 1K BF 20



PRODUCT DESCRIPTION

Polymer-modified, bitumen rubber-based, single-component, highly elastic, thick waterproofing coating material.

AREAS OF APPLICATION

Used for the foundation, curtain walls, wet areas, balconies, terraces, underground parking lots, garden terraces, settling tanks, and for bonding insulation and drainage boards. It is also used for waterproofing in flowerbeds.

ADVANTAGES

Easy and quick to prepare, can be applied with brush, trowel, or spray equipment. Its flexible structure bridges shrinkage cracks and can be applied on vertical and horizontal surfaces. Provides excellent adhesion to the surface, has a long usage life, is solvent-free, and environmentally friendly.

CONSUMPTION CHART

Water Effect	Minimum Application Thickness	Minimum Consumption
Moisture Barrier	2,00 mm	3,00 kg/m ²
Waterproofing (Non-pressurized water)	3,00 mm with Mesh Reinforcement	4,50 kg/m ²
Waterproofing (Pressurized water)	4,00 mm with Mesh Reinforcement	6,00 kg/m ²

STORAGE

- Packaging: 17 kg bucket
- Pallet size: 100*100
- Number of buckets per pallet: 27 units



QUADRO BITUMFLEX 1K BF 22



PRODUCT DESCRIPTION

A single-component, highly elastic, polymer-modified bitumen rubber-based thick waterproofing coating material.

AREAS OF APPLICATION

It is used for foundation and curtain walls, wet areas, balconies and terraces, underground parking lots, and garden terraces. It is also applied in settling tanks, for insulation and drainage board bonding, and in flowerbed waterproofing applications.

ADVANTAGES

Easy and quick to prepare, can be applied with a brush, trowel, or spray equipment. Its flexible structure bridges shrinkage cracks. Can be applied on vertical and horizontal surfaces. Provides excellent adhesion to the surface, has a long usage life, is solvent-free, and environmentally friendly.

CONSUMPTION CHART

Water Effect	Minimum Application Thickness	Minimum Consumption
Moisture Barrier	2,00 mm	3,00 kg/m ²
Waterproofing (Non-pressurized water)	3,00 mm with Mesh Reinforcement	4,50 kg/m ²
Waterproofing (Pressurized water)	4,00 mm with Mesh Reinforcement	6,00 kg/m ²

STORAGE

- Packaging: 17 kg bucket
- Pallet size: 100*100
- Number of buckets per pallet: 27 units



QUADRO BITUMFLEX 2K BF 24



PRODUCT DESCRIPTION

Polymer-modified, bitumen rubber-based, two-component, highly elastic, thick waterproofing coating material.

AREAS OF APPLICATION

Used in all structures, particularly in foundations, curtain walls, wet areas, balconies, terraces, underground parking lots, and garden terraces. Also used in settling tanks, for insulation and drainage board bonding, and in flowerbed waterproofing applications.

ADVANTAGES

Easy and quick to prepare, can be applied with a brush, trowel, or spray equipment. Its flexible structure bridges shrinkage cracks. Can be applied on vertical and horizontal surfaces. Provides excellent adhesion to the surface, has a long usage life, is solvent-free, and environmentally friendly.

CONSUMPTION CHART

Water Effect	Minimum Application Thickness	Minimum Consumption
Moisture Barrier	2,00 mm	3,00 kg/m ²
Waterproofing (Non-pressurized water)	3,00 mm with Mesh Reinforcement	4,50 kg/m ²
Waterproofing (Pressurized water)	4,00 mm with Mesh Reinforcement	6,00 kg/m ²

STORAGE

- Packaging: 30 kg bucket
- Pallet size: 80*120
- Number of buckets per pallet: 18 units



QUADRO BITUMFLEX 2K BF 25



PRODUCT DESCRIPTION

Polymer-modified, bitumen rubber-based, two-component, highly elastic, thick waterproofing coating material.

AREAS OF APPLICATION

Used in all structures, particularly in foundations, curtain walls, wet areas, balconies, terraces, underground parking lots, and garden terraces. Also used in settling tanks, for insulation and drainage board bonding, and in flowerbed waterproofing applications.

ADVANTAGES

Easy and quick to prepare, can be applied with a brush, trowel, or spray equipment. Its flexible structure bridges shrinkage cracks. Can be applied on vertical and horizontal surfaces. Provides excellent adhesion to the surface, has a long usage life, is solvent-free, and environmentally friendly.

CONSUMPTION CHART

Water Effect	Minimum Application Thickness	Minimum Consumption
Moisture Barrier	2,00 mm	3,00 kg/m ²
Waterproofing (Non-pressurized water)	3,00 mm with Mesh Reinforcement	4,50 kg/m ²
Waterproofing (Pressurized water)	4,00 mm with Mesh Reinforcement	6,00 kg/m ²

STORAGE

- Packaging: 30 kg bucket
- Pallet size: 80*120
- Number of buckets per pallet: 18 units



QUADRO BITUMFLEX 2K BF 30



HIGH ELASTICITY

PRODUCT DESCRIPTION

Polymer-modified, bitumen rubber-based, two-component, highly elastic, thick waterproofing coating material.

AREAS OF APPLICATION

Used in all structures, particularly in foundations, curtain walls, wet areas, balconies, terraces, underground parking lots, and garden terraces. Also used in settling tanks, for insulation and drainage board bonding, and in flowerbed waterproofing applications.

ADVANTAGES

Easy and quick to prepare, can be applied with a brush, trowel, or spray equipment. Its flexible structure bridges shrinkage cracks. Can be applied on vertical and horizontal surfaces. Provides excellent adhesion to the surface, has a long usage life, is solvent-free, and environmentally friendly.

CONSUMPTION CHART

Water Effect	Minimum Application Thickness	Minimum Consumption
Moisture Barrier	2,00 mm	3,00 kg/m ²
Waterproofing (Non-pressurized water)	3,00 mm with Mesh Reinforcement	4,50 kg/m ²
Waterproofing (Pressurized water)	4,00 mm with Mesh Reinforcement	6,00 kg/m ²

STORAGE

- Packaging: 30 kg bucket
- Pallet size: 80*120
- Number of buckets per pallet: 18 units



QUADRO BITUM S 1K BS 40



HIGH ELASTICITY

PRODUCT DESCRIPTION

Super elastic, polymer-modified, UV-resistant, bitumen rubber-based, single-component, thick waterproofing coating material.

AREAS OF APPLICATION

Used particularly for roof panel insulation, gutter insulation, and all structures including foundations, curtain walls, wet areas, balconies, and terraces. It is also applied on underground parking lots, garden terraces, for insulation and drainage board bonding. Used for bitumen membrane bonding and in the repair of old bituminous products.

ADVANTAGES

UV resistant. It has very high elasticity and is a single-component material. It is easy to apply, adheres very well to the surface where it is applied. It is easy and quick to prepare, can be applied with a brush, trowel, or spray equipment. Its flexible structure bridges shrinkage cracks. Can be applied on vertical and horizontal surfaces. Provides excellent adhesion to the surface, has a long usage life, is solvent-free, and environmentally friendly.

CONSUMPTION

- 1.50 - 2.00 kg/m²

STORAGE

- Packaging: 5 kg bucket / 20 kg bucket
- Pallet size: 100*100
- Number of buckets per pallet: 27 units



QUADRO BITUM PR BS 10



PRODUCT DESCRIPTION

Water-based bitumen primer used before the application of bitumen products.

AREAS OF APPLICATION

Used as a primer before the application of all water-based bitumen products and bitumen membrane applications.

ADVANTAGES

Ready to use, can be applied with a brush, roller, or spray equipment. Suitable for both vertical and horizontal surfaces, providing excellent adhesion. It has a long usage life, is solvent-free, and environmentally friendly.

CONSUMPTION

- 250 / 500 gr/m²

STORAGE

- **Packaging:** 17 kg bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 27 units



QUADRO PUR BITUM 2K BP 50



HIGH ELASTICITY

PRODUCT DESCRIPTION

Fast curing, bitumen polyurethane-based, super elastic, two-component waterproofing material.

AREAS OF APPLICATION

Suitable for use in all structures, particularly in foundations, curtain walls, bridges, large terraces, wet areas, balconies, underground parking lots, garden terraces, and in flowerbed waterproofing applications.

ADVANTAGES

Easy and quick to prepare, fast curing, can be applied with a brush, roller, or spray equipment. Its super elastic structure bridges shrinkage cracks and can be applied on vertical and horizontal surfaces, providing excellent adhesion.

CONSUMPTION

- 1.50 - 2.00 kg/m²

STORAGE

- **Packaging:** 20 kg + 20 kg set
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 18 units



QUADRO PUR BITUM 2K BP 52



HIGH ELASTICITY

PRODUCT DESCRIPTION

Fast curing, bitumen polyurethane-based, super elastic, two-component waterproofing material.

AREAS OF APPLICATION

Suitable for use in all structures, particularly in foundations, curtain walls, bridges, large terraces, wet areas, balconies, underground parking lots, garden terraces, and in flowerbed waterproofing applications.

ADVANTAGES

Easy and quick to prepare, fast curing, can be applied with a brush, roller, or spray equipment. Its super elastic structure bridges shrinkage cracks and can be applied on vertical and horizontal surfaces, providing excellent adhesion.

CONSUMPTION

- 1,5 / 2 kg/m²

STORAGE

- **Packaging:** 20 kg + 20 kg set
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 18 units



QUADRO PUR BITUM 1K BP 55



HIGH ELASTICITY

PRODUCT DESCRIPTION

Fast curing, bitumen polyurethane-based, super elastic, single-component waterproofing material.

AREAS OF APPLICATION

Suitable for use in all structures, particularly in foundations, curtain walls, bridges, large terraces, wet areas, balconies, underground parking lots, garden terraces, and in flowerbed waterproofing applications.

ADVANTAGES

Easy and quick to prepare, fast curing, can be applied with a brush, trowel, roller, or spray equipment. Its super elastic structure bridges shrinkage cracks and can be applied on vertical and horizontal surfaces, providing excellent adhesion.

CONSUMPTION

- 1,5 / 2 kg/m²

STORAGE

- **Packaging:** 20 kg metal bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 18 units





CEMENT-BASED WATERPROOFING PRODUCTS

CC 100 / **CF 300** / **CL 315** / **CS 325** / **CS 360**
CC 200 / **CL 310** / **CS 320** / **CF 350** / **CS 365**

QUADRO CRYSTAL 1K CC 100



HIGH PRESSURE
RESISTANT

PRODUCT DESCRIPTION

Cement-based, single-component waterproofing product with capillary action, resistant to negative and positive water pressure, forming crystals.

AREAS OF APPLICATION

Suitable for horizontal and vertical applications in all structures, both indoor and outdoor, including basements, foundations, tunnels, swimming pools, and reservoirs. It is used as a waterproofing material in areas exposed to water.

ADVANTAGES

Easy to prepare and apply. Resistant to negative and positive water pressure. Suitable for potable water. QUADRO CRYSTAL CC 100 fills capillary gaps and creates permanent crystals to provide waterproofing.

CONSUMPTION

- 2 / 4 kg/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 64 units



QUADRO CRYSTAL 2K CC 200



HIGH PRESSURE
RESISTANT

PRODUCT DESCRIPTION

Polymer emulsion-modified, cement-based, two-component waterproofing product that forms crystals, resistant to negative and positive water pressure.

AREAS OF APPLICATION

Suitable for use in all structures, particularly in foundations, curtain walls, wet areas, basements, and curtain walls, as well as in storage areas, swimming pools, reservoirs, and food storage areas, as a waterproofing material.

ADVANTAGES

Easy to prepare and apply. Resistant to negative and positive water pressure. Suitable for potable water. QUADRO CRYSTAL CC 200 fills capillary gaps and creates permanent crystals to provide waterproofing. It has high durability, filling capillary gaps with permanent crystals to ensure waterproofing.

CONSUMPTION

- 2 / 4 kg/m²

STORAGE

- **Packaging:** 25 kg + 2 Lt kg set
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 64 units



QUADRO FLX CF 300



SEMI ELASTIC

PRODUCT DESCRIPTION

Polymer emulsion-modified, cement, and acrylic-based, two-component, semi-elastic waterproofing product.

AREAS OF APPLICATION

Suitable for use in all structures, particularly in balconies, kitchens, toilets, bathrooms, and other wet areas as waterproofing under ceramic tiles, in foundation waterproofing, storage areas, and as a waterproofing material for terrace floors that require protection.

ADVANTAGES

Easy to prepare and apply. It is semi-elastic and waterproof. It has a long working time and ensures safe usage for kitchens, bathrooms, and wet areas.

CONSUMPTION

- 2 / 4 kg/m²

STORAGE

- **Packaging:** 20 kg + 5 Lt kg set
- **Pallet size:** 120*120
- **Number of buckets per pallet:** 64 units



QUADRO LASTIC CL 310



HIGH ELASTICITY

PRODUCT DESCRIPTION

Polymer emulsion-modified, cement and acrylic-based, two-component, fully elastic waterproofing product.

AREAS OF APPLICATION

Suitable for use in all structures, particularly in balconies, kitchens, toilets, bathrooms, and other wet areas as waterproofing under ceramic tiles, in foundation waterproofing, storage areas, swimming pools, and as a waterproofing material for terrace floors that require protection.

ADVANTAGES

Easy to prepare and apply. Its full elasticity bridges shrinkage cracks. It has a long working time. Can be used in areas affected by vibration.

CONSUMPTION

- 2 / 4 kg/m²

STORAGE

- **Packaging:** 20 kg + 10 Lt kg set
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 18 units



QUADRO LASTIC UV CL 315



PRODUCT DESCRIPTION

Polymer emulsion-modified, cement and acrylic-based, UV-resistant, two-component, fully elastic waterproofing product.

AREAS OF APPLICATION

uitable for all structures, both indoor and outdoor, including balconies, kitchens, toilets, bathrooms, and other wet areas, foundation waterproofing, storage areas, swimming pools, terrace cracks, and as a waterproofing material for light foot traffic areas.

ADVANTAGES

Easy to prepare and apply. UV resistant and can withstand light foot traffic. Its full elasticity bridges shrinkage cracks. It has a long working time. Can be applied on damp surfaces and can be covered with ceramic tiles.

CONSUMPTION

- 2 / 4 kg/m²

STORAGE

- **Packaging:** 20 kg + 10 Lt kg set
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 64 units



QUADRO S LASTIC CS 320



PRODUCT DESCRIPTION

Polymer emulsion-modified, cement and acrylic-based, two-component, super elastic waterproofing product.

AREAS OF APPLICATION

Suitable for use in all structures, both indoor and outdoor, including balconies, kitchens, toilets, bathrooms, and other wet areas that require high performance for foundation waterproofing, and in storage areas as a waterproofing material.

ADVANTAGES

Easy to prepare and apply. Its super elasticity bridges shrinkage cracks. It is resistant to both negative and positive water pressure. Provides fast and easy application on large surfaces. It has high durability and a long working time. It offers strong adhesion to the surface and can be applied on damp surfaces.

CONSUMPTION

- 2 / 4 kg/m²

STORAGE

- **Packaging:** 20 kg + 10 Lt kg set
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 64 units



QUADRO S LASTIC UV CS 325



PRODUCT DESCRIPTION

Polymer emulsion-modified, cement and acrylic-based, UV-resistant, two-component, super elastic waterproofing product.

AREAS OF APPLICATION

Suitable for use in all structures, both indoor and outdoor, including balconies, kitchens, toilets, bathrooms, and other wet areas that require high performance for foundation waterproofing, storage areas, and areas exposed to vibration. Its super elastic structure bridges shrinkage cracks and can be applied on light foot traffic areas. It is especially ideal for terrace floors.

ADVANTAGES

Easy to prepare and apply. Its high elasticity bridges cracks. Provides fast and easy application on large surfaces. It has high durability and is resistant to UV and frost in outdoor conditions. It offers strong adhesion to the surface and has a long working time.

CONSUMPTION

- 2 / 4 kg/m²

STORAGE

- **Packaging:** 20 kg + 10 Lt kg set
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 64 units



QUADRO FAST 2K CF 350



PRODUCT DESCRIPTION

Polymer emulsion-modified, cement and acrylic-based, two-component, super elastic, fast-curing waterproofing product.

AREAS OF APPLICATION

Suitable for use in all structures, both indoor and outdoor, including balconies, kitchens, toilets, bathrooms, and other wet areas that require high performance for foundation waterproofing, and in storage areas and areas exposed to vibration as a waterproofing material.

ADVANTAGES

Easy to prepare and apply. Cures quickly, regardless of weather conditions. Ensures high surface strength. Its high elasticity bridges cracks. It is resistant to both negative and positive water pressure. Provides fast and easy application on large surfaces. It has high durability and offers strong adhesion to the surface.

CONSUMPTION

- 1,5 – 1,7 kg/m²

STORAGE

- **Packaging:** 20 + 20kg set
5 + 5kg set
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 18 units



QUADRO STOP CS 360



PRODUCT DESCRIPTION

Cement-based, very fast-setting dust water stopper.

AREAS OF APPLICATION

Used as a water stopper in surface drying processes in gaps and cracks where there is active water leakage.

ADVANTAGES

Easy to prepare and apply. Depending on the temperature of the water, it begins to set within 10 to 30 seconds upon contact with water and proceeds to move against the flow of the water. Once set, it does not dissolve. Since it does not contain soda or chlorine, it does not cause corrosion in reinforcement steel.

CONSUMPTION

- 2 / 4 kg/m²

STORAGE

- **Packaging:** 5 kg plastic bucket
10 kg plastic bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 64 units



QUADRO STOP F CS 365



PRODUCT DESCRIPTION

Cement-based, very fast-setting mortar water stopper.

AREAS OF APPLICATION

Used as a water stopper in gaps and cracks where there is active water leakage, and for filling tie rod holes in formwork.

ADVANTAGES

Easy to prepare and apply. It sets very quickly upon contact with water and proceeds to move against the flow of the water. Once set, it does not dissolve. Since it does not contain soda or chlorine, it does not cause corrosion in reinforcement steel.

CONSUMPTION

- 2 / 4 kg/m²

STORAGE

- **Packaging:** 5 kg plastic bucket
10 kg plastic bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 64 units





RESIN-BASED

Waterproofing Products

CA 400 | RP 410 | RP 405 | RP 420

RA 401 | RP 415 | RP 450

QUADRO CERAC CA 400



PRODUCT DESCRIPTION

Acrylic resin-based, ready-to-use, single-component, elastic waterproofing product used under ceramic coatings.

AREAS OF APPLICATION

Suitable for both horizontal and vertical applications in all interior and exterior areas, including bathrooms and kitchens exposed to pressurized water, and as a waterproofing material under ceramic coatings in wet areas.

ADVANTAGES

Easy to prepare and apply. Its elastic structure bridges shrinkage cracks and resists temperature differences. It guarantees continuous adhesion between the adhesive and screed in cases where the ceramic adhesive mortar is exposed to water for prolonged periods.

CONSUMPTION

- 1,5 – 2,0 kg/m²

STORAGE

- **Packaging:** 5 kg plastic bucket
20 kg plastic bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 24 units



QUADRO WHITE RA 401



PRODUCT DESCRIPTION

Acrylic resin-based, ready-to-use, UV-resistant, single-component, super elastic waterproofing product.

AREAS OF APPLICATION

Suitable for both horizontal and vertical applications in all exterior areas, particularly for waterproofing on terrace roofs.

ADVANTAGES

Ready to use and easy to apply. Its elastic structure bridges shrinkage cracks and resists temperature differences. UV resistant, it is unaffected by sunlight and can be painted over.

CONSUMPTION

- 1,5 – 2,0 kg/m²

STORAGE

- **Packaging:** 5 kg plastik bucket
20 kg plastik bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 24 units



QUADRO PUR 1K RP 410



PRODUCT DESCRIPTION

Polyurethane-based, ready-to-use, single-component waterproofing product with high elasticity.

AREAS OF APPLICATION

Suitable for both horizontal and vertical applications in all indoor and outdoor areas, terraces, and as a waterproofing material in areas exposed to light foot traffic for the protection of polyurethane thermal insulation foam.

ADVANTAGES

Ready to use and easy to apply. Its elastic structure bridges shrinkage cracks and resists temperature differences. It is resistant to ponding on terraces.

CONSUMPTION

- 1,5 – 2,5 kg/m²

STORAGE

- **Packaging:** 20 kg metal bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 64 units



QUADRO PUR 1K UV RP 415



PRODUCT DESCRIPTION

Polyurethane-based, ready-to-use, UV-resistant, single-component waterproofing product with high elasticity.

AREAS OF APPLICATION

Suitable for both horizontal and vertical applications in all indoor and outdoor areas, terraces, and as a waterproofing material in areas exposed to light vehicle and foot traffic.

ADVANTAGES

Ready to use and easy to apply. Its elastic structure bridges shrinkage cracks and resists temperature differences. It is resistant to ponding on terraces. UV resistance ensures durability against sunlight effects.

CONSUMPTION

- 1,25 – 1,75 kg/m²

STORAGE

- **Packaging:** 20 kg metal bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 18 units



QUADRO PUR 2K WT RP 455



PRODUCT DESCRIPTION

Polyurethane-based, two-component waterproofing product specially designed for water tanks and reservoirs.

AREAS OF APPLICATION

Suitable for use in all interior and exterior areas, particularly in water tanks, reservoirs, swimming pools, wet areas, and as a waterproofing product in humid environments.

ADVANTAGES

Easy to prepare and apply. Solvent-free and can be applied in enclosed areas. It can withstand constant contact with water and is resistant to chemicals. Its elastic structure resists temperature differences.

CONSUMPTION

- 1,5 – 2 kg/m²

STORAGE

- Packaging: 20kg + 4kg set
- Pallet size: 120*120
- Number of buckets per pallet: 18 units



QUADRO PUR PR RP 405



PRODUCT DESCRIPTION

Polyurethane-based primer used before applications.

AREAS OF APPLICATION

Used as a primer for applications on absorbent concrete and cement-based surfaces, and as a primer for polyurethane-based membrane applications.

ADVANTAGES

Ready to use and easy to apply. Cures quickly. Penetrates into concrete pores and is resistant to water and frost.

CONSUMPTION

- 0,20 – 0,25 kg/m²

STORAGE

- Packaging: 20 kg metal bucket
- Pallet size: 100*100
- Number of buckets per pallet: 24 units



QUADRO PUR IN RP 450



PRODUCT DESCRIPTION

Polyurethane-based, water-reactive, two-component injection product.

AREAS OF APPLICATION

Used as an injection waterproofing product in all indoor and outdoor areas, for sealing cracks and voids in horizontal and vertical structural elements where water leakage occurs.

ADVANTAGES

Quick and easy to prepare. Upon contact with water, it expands volumetrically to form a flexible foam, and this reaction occurs rapidly, providing waterproofing.

CONSUMPTION

- Variable

STORAGE

- **Packaging:** 5 kg + 0.5 kg set
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 64 units



QUADRO PUREA CP 420



PRODUCT DESCRIPTION

Cold polyurea-based, two-component liquid waterproofing product.

AREAS OF APPLICATION

Suitable for both horizontal and vertical applications in all indoor and outdoor areas, including parking lots, terraces, roofs, bridges, and tunnels, as a waterproofing material.

ADVANTAGES

Quick and easy to prepare. Highly resistant to chemicals. Adheres perfectly to all types of surfaces. It has high elasticity, providing excellent crack bridging capabilities.

CONSUMPTION

- 1.50-1.80 kg/m²

STORAGE

- **Packaging:** 10 kg + 1,5 kg set
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 18 units



QUADRO PUREA UV CP 421



PRODUCT DESCRIPTION

Cold polyurea-based, UV-resistant, two-component liquid waterproofing product.

AREAS OF APPLICATION

Suitable for both horizontal and vertical applications in all indoor and outdoor areas, including parking lots, terraces, roofs, bridges, and tunnels, as a waterproofing material.

ADVANTAGES

Quick and easy to prepare. Highly resistant to chemicals. It has high elasticity, providing excellent crack bridging capabilities. Adheres perfectly to all types of surfaces. Thanks to its UV resistance, it can be used in areas left exposed.


CONSUMPTION

- 1.5-1.80 kg/m²

STORAGE

- **Packaging:** 10 kg + 1.5 kg set
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 18 units



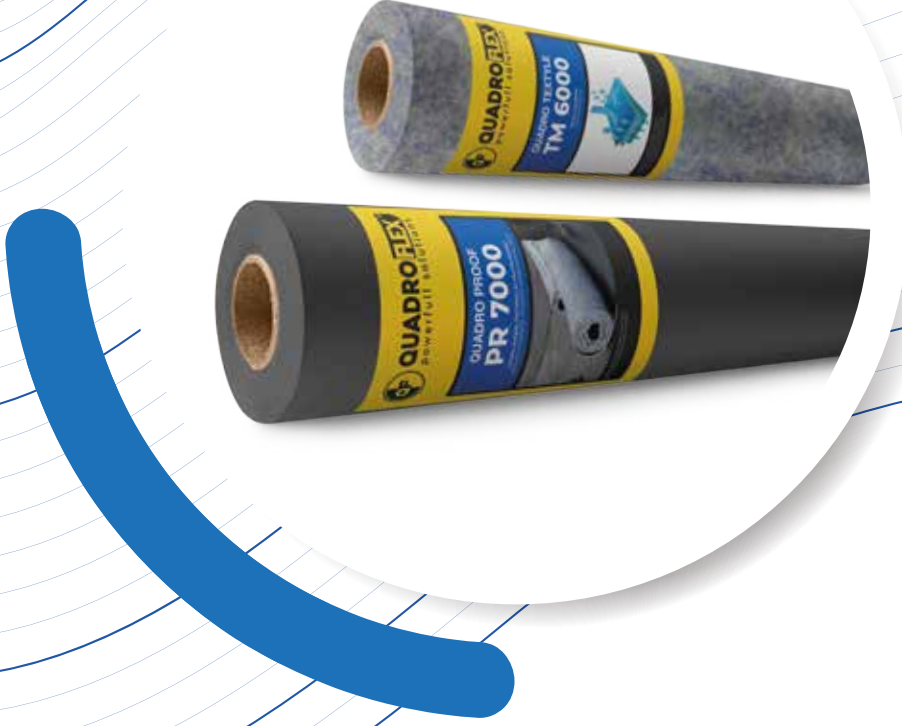

MEMBRANE SYSTEMS

PR 7000 / TM 6000

QUADRO PROOF PR 7000



PRODUCT DESCRIPTION

FPO-based membrane and non-woven geotextile, self-adhesive, high-elasticity waterproofing cover.

AREAS OF APPLICATION

Used as a waterproofing product in prefabricated elements, earth-covered structures, and deep foundations.

ADVANTAGES

Ready to use and easy to apply. Does not require protective concrete. Provides long-term durability. Resistant to chemicals. Saves labor and time. Highly elastic. No heat source is required before concrete pouring or rebar work.

CONSUMPTION

To determine the total amount to be applied, a 10% overlap allowance should be added, and a 2-3% error margin should be added based on the project's conditions.

STORAGE

- **Packaging:** Width 1m Length 20m
- **Pallet size:** 100*100
- **Number of rolls per pallet:** 64 units



QUADRO TEXTYLE TM 6000



PRODUCT DESCRIPTION

FPO-based membrane and non-woven geotextile, self-adhesive, high-elasticity waterproofing cover.

AREAS OF APPLICATION

Used as a waterproofing cover under ceramic tiles in all wet areas like bathrooms, kitchens, and toilets; on terraces and roofs; in water storage areas; and in steel constructions subjected to high vibrations.

ADVANTAGES

Ready to use and easy to apply. Ensures a smooth surface. Ceramic coverings can be applied immediately without waiting. Easy to work with.

CONSUMPTION

- To determine the total amount to be applied, a 10% overlap allowance should be added, and a 2-3% error margin should be added based on the project's conditions.

STORAGE

- **Packaging:** Width 1m Length 50m
- **Pallet size:** 100*100
- **Number of rolls per pallet:** 18 units



MASTICS

PS 600 / PS 605 / PS 610

QUADRO SEAL PS 600



PRODUCT DESCRIPTION

Polyurethane-based, single-component filling and sealing mastic.

AREAS OF APPLICATION

Used in both horizontal and vertical applications in all types of buildings and indoor spaces, especially in filling joints in concrete elements and structure joints, prefabricated element connections, wooden windows and door frame installations, and filling the gap between frames and walls.

ADVANTAGES

Fast and easy to apply. Ready for use. Does not flow or sag. Cures with air humidity. Since it does not become sticky, it does not attract dirt.

CONSUMPTION

- 1dm³ / dm³

STORAGE

- **Packaging:** 600 ml sausage, box of 20
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 64 units

QUADRO SEAL W PS 605



PRODUCT DESCRIPTION

Polyurethane-based, UV-resistant, single-component filling and sealing mastic.

AREAS OF APPLICATION

Used in both horizontal and vertical applications in all types of buildings and indoor spaces, especially in filling joints in concrete elements and structure joints, prefabricated element connections, wooden windows and door frame installations, and filling the gap between frames and walls.

ADVANTAGES

Fast and easy to apply. Ready for use. Does not flow or sag. Cures with air humidity. UV resistant. Since it does not become sticky, it does not attract dirt.

CONSUMPTION

- 1dm³ / dm³

STORAGE

- **Packaging:** 600 ml sausage, box of 20
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 64 units

QUADRO PRO SEAL 2K PS 610



PRODUCT DESCRIPTION

Polyurethane-based, two-component filling and sealing cast mastic.

AREAS OF APPLICATION

Used in both horizontal and vertical applications in all types of buildings and indoor spaces, especially for filling movement joints in concrete elements and structural joints, and as a filling and sealing mastic for wide expansion joints.

ADVANTAGES

Fast and easy to apply. Suitable for wide joints as a pourable sealant. UV resistant. Solvent-free.

CONSUMPTION

- 1,40 kg / dm³

STORAGE

- **Packaging:** 10 kg + 5 kg set
- **Pallet size:** 100*100
- **Number of boxes per pallet:** 64 units



REPAIR AND REINFORCEMENT

MATERIALS

REPAIR MORTARS



REPAIR MORTARS

EM 777	EM 700	CG 720	CM 780	CF 790
EM 778	EG 710	CG 723	CB 785	CO 725

QUADRO EPOXY MULTI EM 777



PRODUCT DESCRIPTION

Epoxy-based, two-component repair, assembly, and anchoring mortar.

AREAS OF APPLICATION

Used in all indoor and outdoor building applications, for bonding concrete elements to iron, steel, and similar metals, anchoring dowels and bolts, repairing cracks in areas subjected to water or heavy load, bonding expansion bands, and repairing static cracks through injection.

ADVANTAGES

Quick and easy to apply. Offers high adhesion to steel, metal, and concrete. Economical. Does not sag. Highly effective in protecting reinforcements against corrosion.

CONSUMPTION

- 1,7 kg / Lt

STORAGE

- **Packaging:** 3,75 kg + 1,25 kg set
- **Pallet size:** 100*100
- **Number of sets per pallet:** 64 units



QUADRO EPOXY FIX EM 778



PRODUCT DESCRIPTION

Epoxy-based, two-component expansion joint tape adhesive.

AREAS OF APPLICATION

Used in both indoor and outdoor building applications, for bonding iron, steel, and similar metals to reinforced concrete elements, bonding expansion joint tapes, anchoring dowels and bolts, medium and heavy load mounting applications, and pre-injection static crack repairs.

ADVANTAGES

Fast and easy to apply. Provides strong adhesion to steel, metal, and concrete. Economical. Does not sag. Highly effective in protecting reinforcements against corrosion.

CONSUMPTION

- 1,7 kg / Lt

STORAGE

- **Packaging:** 3,75 kg + 1,25 kg set
- **Pallet size:** 100*100
- **Number of sets per pallet:** 18 units



QUADRO EPOXY MORTAR EM 700



PRODUCT DESCRIPTION

Epoxy-based, two-component, thick-grained, high-strength repair mortar.

AREAS OF APPLICATION

Used for indoor and outdoor applications of all structures, for surface repairs on concrete and horizontal surfaces, providing a smooth base for epoxy and waterproofing applications on floors where wear resistance is required, and in surfaces where strength and protection are needed.

ADVANTAGES

Fast and easy to apply. Has high adhesion. Can be used for structural repairs. Resistant to thermal changes and does not shrink or form cracks due to shrinkage.

CONSUMPTION

- 2,00 kg/dm³

STORAGE

- **Packaging:** 20 kg + 2,5 kg set
- **Pallet size:** 100*100
- **Number of sets per pallet:** 64 units



QUADRO EPOXY GROUT EG 710



PRODUCT DESCRIPTION

Epoxy-based, two-component, high-strength grout mortar.

AREAS OF APPLICATION

Used in the foundation installation of heavy and vibrating machines, fixing steel structures to the foundation, and filling voids in concrete during the installation of columns in steel structures.

ADVANTAGES

Quick and easy to apply. It has high adhesion. Resistant to thermal changes and does not shrink or form cracks. Its fluid consistency allows it to settle into the application area by itself.

CONSUMPTION

- 1,85 kg/m²

STORAGE

- **Packaging:** 15 kg + 3,25 kg set
- **Pallet size:** 100*100
- **Number of sets per pallet:** 64 units



QUADRO GROUT CG 720



PRODUCT DESCRIPTION

Cement-based, single-component, high-strength grout mortar.

AREAS OF APPLICATION

Used in the foundation installation of machine feet, filling voids in concrete at column curtain heads, filling voids in prefabricated structures, and fixing columns to the foundation in steel structures.

ADVANTAGES

Quick and easy to apply. It has high adhesion. Resistant to thermal changes and does not shrink or form cracks. The low water/cement ratio ensures waterproofing.

CONSUMPTION

- 1,85 kg/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO GROUT S CG 723



PRODUCT DESCRIPTION

Quick and easy to apply. It cures quickly. High adhesion. Resistant to thermal changes, it does not shrink or crack. The low water/cement ratio ensures waterproofing.

AREAS OF APPLICATION

Used in the foundation installation of machine feet, filling voids in concrete at column curtain heads, filling voids in prefabricated structures, and fixing columns to the foundation in steel structures.

ADVANTAGES

Quick and easy to apply. It cures quickly. It has high adhesion. Resistant to thermal changes, it does not shrink or crack. The low water/cement ratio ensures waterproofing.

CONSUMPTION

- 1,85 kg/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO MORTAR CM 780



PRODUCT DESCRIPTION

Cement-based, single-component, high-strength, fast-curing structural repair mortar.

AREAS OF APPLICATION

Used in indoor and outdoor spaces of all structures, for filling tie rod gaps, creating chamfer strips, and repairing concrete surfaces before waterproofing applications.

ADVANTAGES

Easy and fast to apply. Has high adhesion. Can be used in structural repairs. Resistant to temperature changes, it does not shrink or crack. The low water/cement ratio ensures waterproofing. Thanks to its thixotropic feature, it does not sag.

CONSUMPTION

- 1,7 kg/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO MORTAR T CB 785



PRODUCT DESCRIPTION

Cement-based, single-component, high-strength, fine repair mortar.

AREAS OF APPLICATION

Used in indoor and outdoor areas of all structures, for wall and ceiling repairs, and for repairing concrete surfaces before waterproofing applications.

ADVANTAGES

Easy and quick to apply. Has high adhesion. Resistant to temperature changes, it does not shrink or crack. The low water/cement ratio ensures waterproofing. Thanks to its thixotropic feature, it does not sag.

CONSUMPTION

- 1,7 kg/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO CEMENT F CF 790



PRODUCT DESCRIPTION

Cement-based, single-component, high-strength, fast-curing mortar cement.

AREAS OF APPLICATION

Used as mortar cement for all construction works to be opened quickly in both interior and exterior areas of structures.

ADVANTAGES

Easy and quick to apply. Cures quickly. Tile, ceramic, and similar coatings can be applied in a short time. Resistant to temperature changes.

CONSUMPTION

- **Mixing Ratio 1:4:** 3.7 kg dust/m²
- **Mixing Ratio 1:5:** 3.1 kg dust/m²
- **Mixing Ratio 1:6:** 2.6 kg dust/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO CONCRETE 25 CO 725



PRODUCT DESCRIPTION

C25 F6 type ready-mixed concrete.

AREAS OF APPLICATION

Used for filling and repairing gaps in foundations, floors, and other surfaces in all indoor and outdoor structures, as well as in trenching applications.

ADVANTAGES

Easy and quick to apply. High strength. Can be applied up to 30 cm thickness.

CONSUMPTION

- **20.0 kg/m²** for 1 cm thickness.

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units





MORTAR ADDITIVES

QUADRO WP WP 1100



PRODUCT DESCRIPTION

A mortar additive that improves the strength and application properties of concrete and mortar, increasing water impermeability.

AREAS OF APPLICATION

Used in the foundation, basement, retaining walls, tunnels, canals, weirs, and pools of all buildings for concrete, mortar, and plaster.

ADVANTAGES

Ready to use. Increases the water impermeability of the mortar. Enhances the durability and performance of the applied mortar.

CONSUMPTION

- Use 3% to 6% of the amount of cement applied.

STORAGE

- **Packaging:** 5 kg / 30kg plastic jerrycan
- **Pallet size:** 100*100
- **Number of jerrycans per pallet:** 27 units



QUADRO LATEX LX 1200



PRODUCT DESCRIPTION

An acrylic dispersion-based additive that improves the strength, impermeability, and adhesion of the applied mortar.

AREAS OF APPLICATION

Used as an additive to enhance adhesion in repair mortars, plaster, screeds, and plastering mortars in all indoor and outdoor areas.

ADVANTAGES

Fast and easy to apply. Ready to use. Increases the adhesion and durability of the mortar. Enhances water impermeability. Adds elasticity to the mortar, preventing cracking.

CONSUMPTION

- Use 5% to 20% of the amount of cement applied.

STORAGE

- **Packaging:** 5 kg / 30kg plastic jerrycan
- **Pallet size:** 100*100
- **Number of jerrycans per pallet:** 27 units



QUADRO CRISTAL LIQUID CL 2000



PRODUCT DESCRIPTION

A liquid crystallization concrete additive that forms crystals within concrete, preventing the ingress of water.

AREAS OF APPLICATION

Used in all structural and basement floors, retaining walls, concrete pipes, tunnels, canals, dams, sewers, and treatment plants.

ADVANTAGES

Easy and fast to apply. Ready to use. Enhances structural water impermeability. Reduces labor costs. Used during concrete pouring. Cracks up to 0.4 mm are sealed with crystalline formations. Remains actively protective throughout the structure's service life.

CONSUMPTION

• Use approximately 2% of the amount of cement to be applied.

STORAGE

- **Packaging:** 5 kg / 30kg plastic jerrycan, 200kg drum
- **Pallet size:** 100*100
- **Number of jerrycans per pallet:** 27 units



QUADRO CRISTAL POWDER CP 2020



PRODUCT DESCRIPTION

A powdered crystallization concrete additive that forms crystals within concrete, preventing the ingress of water.

AREAS OF APPLICATION

Used in all structural and basement floors, retaining walls, concrete pipes, tunnels, canals, dams, sewers, and treatment plants.

ADVANTAGES

Easy and fast to apply. Ready to use. Enhances structural water impermeability. Reduces labor costs. Used during concrete pouring. Cracks up to 0.4 mm are sealed with crystalline formations. Provides active protection throughout the structure's service life.

CONSUMPTION

• Use approximately 2% of the amount of cement to be applied.

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO LIQUID LIME LL 1560



PRODUCT DESCRIPTION

A liquid additive used in place of lime in screed and plaster applications, improving workability and flowability of the applied product.

AREAS OF APPLICATION

Used in all indoor and outdoor plaster and screed applications, brick wall mortars, decorative applications, and cement-based plaster mortars.

ADVANTAGES

Quick and easy to apply. Increases the flowability of the mortar. Enhances workability and reduces the amount of water needed, thereby increasing the mortar's strength. It is cost-effective. Improves the workability of the mortar and saves on labor costs.

CONSUMPTION

- Use approximately 0.1% - 0.5% of the cement amount.

STORAGE

- **Packaging:** 5 kg / 30kg plastic drum
- **Pallet size:** 120*120
- **Number of drums per pallet:** 64 units



QUADRO PLASTICIER MS 1540



PRODUCT DESCRIPTION

A high-performance air-entraining super plasticizer additive used in plaster and screed applications.

AREAS OF APPLICATION

Used as an additive in all indoor and outdoor applications, brick wall mortars, fine, thin, and coarse plaster applications, and all long-term workable mortar applications.

ADVANTAGES

Quick and easy to apply. Ready to use. It controls air entrainment and enhances workability in the liquid it is added to. Its high flowability allows it to easily settle. Reduces labor. By reducing the water-cement ratio, it increases the durability of the mortar. Resistant to freeze-thaw effects. Has early strength gain.

CONSUMPTION

- Use approximately 0.1% - 0.6% of the cement amount.

STORAGE

- **Packaging:** 30kg plastic drum / 200kg barrel
- **Pallet size:** 100*100
- **Number of drums per pallet:** 64 units



QUADRO PLASTICIER H PC 1550



PRODUCT DESCRIPTION

A high-performance air-entraining hyper plasticizer additive used in plaster and screed applications.

AREAS OF APPLICATION

Used as an additive in all indoor and outdoor applications, brick wall mortars, fine, thin, and coarse plaster applications, and all long-term workable mortar applications.

ADVANTAGES

Quick and easy to apply. Ready to use. Enhances workability by controlling air entrainment in the liquid it is added to. Its high flowability allows it to easily settle. Reduces labor. By reducing the water-cement ratio, it increases the durability of the mortar. Resistant to freeze-thaw effects. Has very high early strength gain.

CONSUMPTION

- Use approximately 0.1% - 0.6% of the cement amount.

STORAGE

- **Packaging:** 30 kg plastic drum / 200kg barrel
- **Pallet size:** 120*120
- **Number of drums per pallet:** 64 units





EXTERIOR WALL

PRODUCTS

THERMAL INSULATION
PAINT AND COATING



THERMAL INSULATION

| TG 655 | TL 650 | TP 645 | TA 640

QUADRO THERMO T TG 655



PRODUCT DESCRIPTION

Cement-based, textured, waterproof, top layer decorative mineral plaster.

AREAS OF APPLICATION

Used as a final coat plaster in decorative plaster applications on desired exterior surfaces, before painting in insulation systems.

ADVANTAGES

Easy to prepare and apply. It has high adhesion to surfaces containing minerals. It is resistant to temperature changes. Long working time.

CONSUMPTION

• 2,5 – 3,5 kg/m².

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 bags



QUADRO THERMO C TL 650



PRODUCT DESCRIPTION

Cement-based, textured, water-resistant, decorative mineral plaster applied as the final coat.

AREAS OF APPLICATION

Cement-based, textured, water-resistant, decorative mineral plaster applied as the final coat.

ADVANTAGES

Easy to prepare and apply. Has high adhesion on surfaces containing minerals. Resistant to temperature changes. Long working time.

CONSUMPTION

• 2,5 – 3,5 kg/m².

STORAGE

- **Packaging:** 25kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO THERMO S TP 645



PRODUCT DESCRIPTION

Cement-based, polymer-reinforced, single-component plaster mortar for thermal insulation boards and mineral surfaces.

AREAS OF APPLICATION

Used in all interior and exterior structures, as an adhesive and plaster in thermal insulation systems, and as a surface repair and finishing plaster for mineral surfaces prior to painting.

ADVANTAGES

Easy to prepare and apply. High adhesion to mineral surfaces. Resistant to temperature changes. Long working time.

CONSUMPTION

- 4 - 6 kg/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO THERMO Y TA 640



PRODUCT DESCRIPTION

Cement-based, polymer-reinforced, single-component adhesive mortar for thermal insulation boards.

AREAS OF APPLICATION

Used in all interior and exterior structures as an adhesive in thermal insulation systems, and for surface repair applications on mineral surfaces before painting.

ADVANTAGES

Easy to prepare and apply. High adhesion to mineral surfaces. Resistant to temperature changes. Long working time.

CONSUMPTION

- 4 - 6 kg/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units





PAINT AND COATING

| SX 680 | WC 685 | CO 690 | CP 695

QUADRO SILOX SX 680



PRODUCT DESCRIPTION

Acrylic emulsion-based, water-based coating that provides water resistance for exterior surfaces.

AREAS OF APPLICATION

Used as a water-repellent coating on absorbent surfaces such as concrete, plaster, stone, and natural stone in all structures, both indoors and outdoors.

ADVANTAGES

Ready to use and easy to apply. Provides a water-repellent exterior surface for structures. Protects concrete from external effects. Its transparent color preserves the natural appearance of the surface. It offers strong adhesion when paint is applied over it.

CONSUMPTION

• 0,2 – 0,7 kg/m².

STORAGE

- **Packaging:** 5 kg + 30 kg plastic drum
- **Pallet size:** 100*100
- **Number of drums per pallet:** 27 units



QUADRO WP COAT WC 685



PRODUCT DESCRIPTION

Acrylic emulsion-based, water-based, UV-resistant waterproofing coating for exterior applications.

AREAS OF APPLICATION

Used in exterior applications for all structures.

ADVANTAGES

Ready to use and easy to apply. Forms a continuous waterproof layer. Aesthetic and has strong adhesion. It has very high elasticity and is highly resistant to temperature changes. It has crack-bridging properties and long working time.

CONSUMPTION

• 0,4 – 0,8 kg/m²

STORAGE

- **Packaging:** 20 kg plastic bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 27 units



QUADRO COAT CO 690



PRODUCT DESCRIPTION

Water-based, acrylic-based, topcoat paint for exterior applications.

AREAS OF APPLICATION

Used in exterior applications for all structures.

ADVANTAGES

Ready to use and easy to apply. Aesthetic with a wide range of color options. Strong adhesion to mineral surfaces. Water-repellent. Offers high coverage.

CONSUMPTION

• 0,35 – 0,45 kg/m².

STORAGE

- **Packaging:** 20 kg plastic bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 27 units



QUADRO COAT PR CP 695



PRODUCT DESCRIPTION

Water-based, acrylic-based primer for exterior applications.

AREAS OF APPLICATION

Used in exterior applications for all structures.

ADVANTAGES

Ready to use and easy to apply. Strong adhesion to mineral surfaces. Increases adhesion between the surface and the paint applied over it. Prevents high paint consumption.

CONSUMPTION

• 0,15 – 0,25 kg/m².

STORAGE

- **Packaging:** 20 kg plastik bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 27 units





FLOOR COATING SYSTEMS

CEMENT-BASED
EPOXY-BASED



CEMENT-BASED

FLOOR COATING SYSTEMS

FL 900	CU 970	CU 980	SL 925	FP 935
FL 905	CU 975	SL 920	FP 930	

QUADRO FLOOR Q FL 900



PRODUCT DESCRIPTION

Cement-based, single-component, quartz aggregate surface hardener applied by spreading on surfaces with high abrasion resistance.

AREAS OF APPLICATION

Used in all interior and exterior areas of structures to increase the mechanical abrasion resistance and reduce dusting of industrial floors exposed to heavy vehicle and foot traffic, such as warehouses, depots, parking lots, factories, shopping centers, and similar general-purpose floor coating applications.

ADVANTAGES

Easy to prepare and apply. It gives the concrete surface high strength where applied. Delays surface dusting. Increases impact resistance after application. Ensures a smooth and homogeneous surface after application.

CONSUMPTION

- 4 – 6 kg/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO FLOOR K FL 905



PRODUCT DESCRIPTION

Cement-based, single-component, corundum aggregate surface hardener applied by spreading on surfaces with high abrasion resistance.

AREAS OF APPLICATION

Used in all interior and exterior areas of structures to increase the mechanical abrasion resistance and reduce dusting of industrial floors exposed to heavy vehicle and foot traffic, such as warehouses, depots, parking lots, factories, shopping centers, and similar general-purpose floor coating applications.

ADVANTAGES

Easy to prepare and apply. It gives the concrete surface high strength where applied. Delays surface dusting. Increases impact resistance after application. Ensures a smooth and homogeneous surface after application.

CONSUMPTION

- 4 – 6 kg/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO CURE ACR CU 970



PRODUCT DESCRIPTION

Acrylic-based curing compound that forms a layer increasing the mechanical strength on concrete, screed, and cement-based surfaces.

AREAS OF APPLICATION

Used as a curing compound on acrylic-based, concrete, screed, and cement-based surfaces to increase mechanical strength.

ADVANTAGES

Easy to prepare and apply. Forms a thin film on fresh concrete, screed, and surface hardeners, providing fast drying and preventing cracks. Traps the necessary water for hydration within the concrete. Solvent-free.

CONSUMPTION

- On raw concrete surfaces: 0.2 – 0.25 kg/m²
- If surface hardening is applied: 0.15 – 0.2 kg/m²

STORAGE

- Packaging: 30 kg plastic drum
- Pallet size: 100*100
- Number of drum per pallet: 27 units



QUADRO CURE PRF CU 975



PRODUCT DESCRIPTION

Paraffin-based curing compound that forms a layer increasing the mechanical strength on concrete, screed, and cement-based surfaces.

AREAS OF APPLICATION

Used as a curing compound on paraffin-based, concrete, screed, and cement-based surfaces to increase mechanical strength.

ADVANTAGES

Easy to prepare and apply. Forms a thin film on fresh concrete, screed, and surface hardeners, providing fast drying and preventing cracks. Traps the necessary water for hydration within the concrete. Solvent-free.

CONSUMPTION

- On raw concrete surfaces: 0.2 – 0.25 kg/m²
- If surface hardening is applied: 0.15 – 0.2 kg/m²

STORAGE

- Packaging: 30 kg plastic drum
- Pallet size: 100*100
- Number of buckets per pallet: 27 units



QUADRO CURE S CU 980



PRODUCT DESCRIPTION

Solvent-based curing compound that forms a layer increasing the mechanical strength on concrete, screed, and cement-based surfaces.

AREAS OF APPLICATION

Used as a curing compound on solvent-based, concrete, screed, and cement-based surfaces to increase mechanical strength.

ADVANTAGES

Solvent-based. Forms a curing layer on concrete, screed, and cement-based surfaces that increases mechanical strength.

CONSUMPTION

- The product can be cleaned with water while it is wet.
- After drying, it can only be cleaned mechanically.

STORAGE

- **Packaging:** 25 kg plastik drum
- **Pallet size:** 100*100
- **Number of drums per pallet:** 27 units



QUADRO FLOOR SL SL 920



PRODUCT DESCRIPTION

Cement-based, single-component, self-leveling screed that can be applied in a single layer of 1-10 mm.

AREAS OF APPLICATION

Used as a leveling screed on interior floors of all structures before the topcoat application.

ADVANTAGES

Easy to prepare and apply. Since it self-levels, it forms a smooth surface. Suitable for leveling uneven surfaces between 1-10 mm. It does not cause blistering or cracking. It can be opened to foot traffic 6 hours after application. Resistant to abrasion.

CONSUMPTION

- 1,7 kg/dm³

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO FLOOR SL-F SL 925



PRODUCT DESCRIPTION

Cement-based, single-component, self-leveling screed that can be applied in a single layer of 1-10 mm.

AREAS OF APPLICATION

Used as a leveling screed on interior floors of all structures before the topcoat application.

ADVANTAGES

Easy to prepare and apply. Since it self-levels, it forms a smooth surface. Suitable for leveling uneven surfaces between 1-10 mm. It does not cause blistering or cracking. Can be opened to foot traffic 4 hours after application. Resistant to abrasion.

CONSUMPTION

- On raw concrete surface: 1.70 kg/dm³
- If surface hardening is applied: 0.15 – 0.2 kg/m²

STORAGE

- Packaging: 25 kg kraft bag
- Pallet size: 100*100
- Number of buckets per pallet: 64 units



QUADRO POLISH FP 930



PRODUCT DESCRIPTION

Solvent-based, transparent polish and varnish that gives a glossy appearance and protects concrete and stone surfaces.

AREAS OF APPLICATION

Used on all absorbent surfaces in indoor and outdoor areas of structures where protection and gloss are desired on concrete and stone surfaces.

ADVANTAGES

Ready to use and easy to apply. Provides an aesthetic appearance with its gloss and prevents dust formation on the surface.

CONSUMPTION

- 0,3 – 0,5 kg/m²

STORAGE

- Packaging: 20 kg metal bucket
- Pallet size: 100*100
- Number of buckets per pallet: 18 units



QUADRO P FP 935



PRODUCT DESCRIPTION

Ready to use and easy to apply. Provides an aesthetic appearance with its gloss and prevents dust formation on the surface.

AREAS OF APPLICATION

Used as floor paint in all indoor and outdoor areas of structures, on horizontal and vertical surfaces such as concrete, screed, and pavement stones in factories, bicycle paths, walking paths, shopping center floors, and parks.

ADVANTAGES

Ready to use and easy to apply. Has high coverage capability. It provides a matte finish and creates a homogeneous surface. Resistant to pedestrian and vehicle traffic. Resistant to abrasion. Dries quickly.

CONSUMPTION

• 0,3 – 0,4 kg/m²

STORAGE

- **Packaging:** 20 kg plastic bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 27 units





EPOXY-BASED

FLOOR COATING SYSTEMS

EP 940 | **ES 950** | **EC 960**
EP 941 | **ES 955** | **ET 965**

QUADRO EP PRIMER EP 940



PRODUCT DESCRIPTION

Epoxy-based, two-component, high-strength primer.

AREAS OF APPLICATION

Used in all interior and exterior areas of structures, under epoxy/polyurethane floor coatings, and on damp or wet surfaces to control moisture and eliminate the risk of blistering.

ADVANTAGES

Ready to use and easy to apply. Has a short drying time. Provides high adhesion on absorbent surfaces. Covers the surface homogeneously. Can be used as a primer for all epoxy products.

CONSUMPTION

• 300 – 500 gr/m²

STORAGE

- **Packaging:** 20 kg + 5 Kg Set / 16 Kg + 4 Kg set
- **Pallet size:** 100*100
- **Number of sets per pallet:** 18 units



QUADRO EP PRIMER EP 941



PRODUCT DESCRIPTION

Epoxy-based, two-component, high-strength filled primer.

AREAS OF APPLICATION

Used in all interior and exterior areas of structures, under epoxy/polyurethane floor coatings, and on damp or wet surfaces to control moisture and eliminate the risk of blistering.

ADVANTAGES

Ready to use and easy to apply. Has a short drying time. Provides high adhesion on absorbent surfaces. Covers the surface homogeneously. Can be used as a primer for all epoxy products.

CONSUMPTION

• 300 – 500 gr/m²

STORAGE

- **Packaging:** 20 kg + 5 Kg Set / 16 Kg + 4 Kg set
- **Pallet size:** 100*100
- **Number of sets per pallet:** 18 units



QUADRO EP SELF ES 950



PRODUCT DESCRIPTION

Epoxy-based, two-component, solvent-free, self-leveling topcoat product.

AREAS OF APPLICATION

Used in all indoor areas of structures, in areas with medium to heavy industrial loads, on cement and concrete surfaces, in sewage and waste facilities, in hospitals and food processing plants, as well as in warehouses and factories.

ADVANTAGES

Used in indoor areas of all structures, in areas with medium to heavy industrial loads, on cement and concrete surfaces, in sewage and waste facilities, in hospitals, food processing plants, warehouses, and factories.

CONSUMPTION

- 0,2 – 0,5 kg/m²

STORAGE

- **Packaging:** 20 kg metal bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 18 units



QUADRO EP SELF ES 955



PRODUCT DESCRIPTION

Epoxy-based, two-component, solvent-free, self-leveling intermediate coat product.

AREAS OF APPLICATION

Used in all indoor areas of structures, in areas with medium to heavy industrial loads, on cement and concrete surfaces, in sewage and waste facilities, in warehouses and factories.

ADVANTAGES

Easy to prepare and apply. Offers high mechanical strength. Resistant to chemicals. Highly resistant to abrasion. Easy to clean and maintain. Covers the surface homogeneously.

CONSUMPTION

- 0,2 – 0,5 kg/m²

STORAGE

- **Packaging:** 20 kg metal bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 18 units



QUADRO EP COAT EC 960



PRODUCT DESCRIPTION

Epoxy-based, two-component, solvent-free paint and coating product that can be used as a floor coating under light load conditions.

AREAS OF APPLICATION

Used in all indoor areas of structures, on vertical and horizontal surfaces in areas with light industrial loads, on cement and concrete surfaces, and on mineral-based surfaces, as well as in sewage and waste facilities, warehouses, and factories.

ADVANTAGES

Easy to prepare and apply. Can be applied on vertical and horizontal surfaces. Offers high mechanical strength and chemical resistance. Highly resistant to abrasion. Easy to clean and maintain. Covers the surface homogeneously.

CONSUMPTION

• 0,2 – 0,6 kg/m²

STORAGE

- **Packaging:** 20 kg metal bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 18 units



QUADRO EP TX ET 965



PRODUCT DESCRIPTION

Epoxy-based, two-component, solvent-free paint and coating product that provides an orange peel texture due to its special formulation.

AREAS OF APPLICATION

Used in all indoor areas of structures, in areas with medium to heavy industrial loads, on cement and concrete surfaces, and in sewage and waste facilities, warehouses, and factories.

ADVANTAGES

Easy to prepare and apply. Can be applied on vertical and horizontal surfaces. Offers high mechanical strength and chemical resistance. Highly resistant to abrasion. Easy to clean and maintain. Covers the surface homogeneously.

CONSUMPTION

• 0,5 – 0,8 kg/m²

STORAGE

- **Packaging:** 20 kg metal bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 18 units





PRIMERS

CERAMIC ADHESIVES

AND JOINT FILLERS



PRIMERS

| **PC 500** | **PC 505** | **PS 510**

QUADRO PRIMER C PC 500



PRODUCT DESCRIPTION

Water-based brute concrete plaster primer.

AREAS OF APPLICATION

Ready to use, can be applied with a brush, roller, or spray equipment on vertical or horizontal surfaces. Provides excellent adhesion to the surface, has a long usage time, is solvent-free, and environmentally friendly.

ADVANTAGES

Ready to use, can be applied with a brush, roller, or spray equipment. Provides excellent adhesion on vertical and horizontal surfaces, has a long usage time, is solvent-free, and environmentally friendly.

CONSUMPTION CHART

- 0,2 kg/m²

STORAGE

- **Packaging:** 20 kg plastic bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 27 units

QUADRO PRIMER M PC 505



PRODUCT DESCRIPTION

High-adhesion primer used to strengthen adhesion between brute concrete surfaces and the screed or concrete applied below.

AREAS OF APPLICATION

Used as a screed underlay primer on brute concrete surfaces on horizontal and vertical surfaces in all interior and exterior areas of structures.

ADVANTAGES

Ready to use, can be applied with a brush, roller, or spray equipment. Provides excellent adhesion on vertical and horizontal surfaces, has a long usage time, is solvent-free, and environmentally friendly.

CONSUMPTION CHART

- 0,200 - 0,500 kg/m²

STORAGE

- **Packaging:** 5 kg plastic drum / 30 kg plastic drum
- **Pallet size:** 100*100
- **Number of drums per pallet:** 27 units

QUADRO PRIMER S PS 510



PRODUCT DESCRIPTION

Single-component adhesion-enhancing primer used before ceramic-on-ceramic applications.

AREAS OF APPLICATION

Used as an adhesion enhancer for ceramic-on-ceramic applications on vertical and horizontal surfaces in all interior and exterior areas of structures.

ADVANTAGES

Ready to use, can be applied with a brush, roller, or spray equipment on vertical and horizontal surfaces. It can be used in ceramic-on-ceramic applications, providing excellent adhesion to the surface. It has a long usage time, is solvent-free, and environmentally friendly.

CONSUMPTION CHART

- 0,2 kg/m²

STORAGE

- **Packaging:** 5 kg plastik bucket
- **Pallet size:** 100*100
- **Number of buckets per pallet:** 27 units



CERAMIC ADHESIVES

CA 220	CA 225 W	CA 235 W	CA 240 W
CA 225	CA 235	CA 240	SA 245

QUADRO CERAD 1 CA 220



C1 TE

PRODUCT DESCRIPTION

Cement-based, single-component ceramic adhesive mortar with reduced slip feature.

C1: Normal setting cement-based adhesive
T: Reduced slip feature
E: Extended open time

AREAS OF APPLICATION

Used in all interior and exterior areas of structures, on vertical and horizontal surfaces, in wet areas such as bathrooms, toilets, and kitchens; for the installation of ceramics, tiles, glass mosaics, and similar covering materials.

ADVANTAGES

Fast and easy to apply. Labor-friendly. High adhesion.

CONSUMPTION

• 4 - 6 kg/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO CERAD 2 CA 225



C2 TE

PRODUCT DESCRIPTION

Cement-based, single-component ceramic, porcelain, and granite adhesive mortar with reduced slip feature.

C2: Cement-based adhesive with additional improved features
T: Reduced slip feature
E: Extended open time

AREAS OF APPLICATION

Used in all interior and exterior areas of structures, on vertical and horizontal surfaces, in wet areas such as bathrooms, toilets, and kitchens; for the installation of ceramics, tiles, porcelain, granite, glass mosaics, and similar covering materials.

ADVANTAGES

Fast and easy to apply. High adhesion. Labor-friendly. Extended working time.

CONSUMPTION

• 4 - 6 kg/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO CERAD 2 W CA 225 W



C2 TE

PRODUCT DESCRIPTION

Cement-based, single-component, white-colored ceramic, porcelain, and granite adhesive mortar with reduced slip feature.

C2: Cement-based adhesive with additional improved features
T: Reduced slip feature
E: Extended open time

AREAS OF APPLICATION

Used in all interior and exterior areas of structures, on vertical and horizontal surfaces, in wet areas such as bathrooms, toilets, and kitchens; for the installation of ceramics, tiles, porcelain, granite, glass mosaics, and similar covering materials.

ADVANTAGES


Fast and easy to apply. High adhesion. Labor-friendly. Extended working time.

CONSUMPTION

• 4 - 6 kg/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units

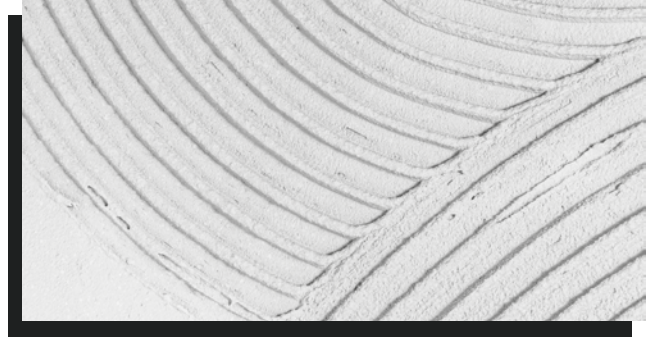

QUADRO CERAD 2 S CA 235



C2 TE S1

PRODUCT DESCRIPTION

Cement-based, single-component, flexible ceramic, porcelain, and granite adhesive mortar with reduced slip feature.

C2: Cement-based adhesive with additional improved features
T: Reduced slip feature
E: Extended open time
S1: Flexible

AREAS OF APPLICATION

Used in all interior and exterior areas of structures, on vertical and horizontal surfaces, in wet areas such as bathrooms, toilets, and kitchens; for the installation of ceramics, tiles, porcelain, glass mosaics, and similar covering materials.

ADVANTAGES

Fast and easy to apply. Flexible. High adhesion. Labor-friendly. Extended working time. No slipping in vertical applications. Resistant to temperature changes.

CONSUMPTION

• 4 - 6 kg/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO CERAD 2 S W CA 235 W



C2 TE S1

PRODUCT DESCRIPTION

Cement-based, single-component, white-colored, flexible ceramic, porcelain, and granite adhesive mortar with reduced slip feature.

C2: Cement-based adhesive with additional improved features
T: Reduced slip feature
E: Extended open time
S1: Flexible

AREAS OF APPLICATION

Used in all interior and exterior areas of structures, on vertical and horizontal surfaces, in wet areas such as bathrooms, toilets, and kitchens; for the installation of ceramics, tiles, porcelain, glass mosaics, and similar covering materials.

ADVANTAGES

Fast and easy to apply. Flexible. High adhesion. Labor-friendly. Extended working time. No slipping in vertical applications. Resistant to temperature changes.

CONSUMPTION

• 4 - 6 kg/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO CERAD 2S2 CA 240



C2 TE S2

PRODUCT DESCRIPTION

Cement-based, single-component, highly flexible ceramic, porcelain, and granite adhesive mortar with reduced slip feature.

C2: Cement-based adhesive with additional improved features
T: Reduced slip feature
E: Extended open time
S2: Highly flexible

AREAS OF APPLICATION

Used in all interior and exterior areas of structures, on vertical and horizontal surfaces, in high-traffic and large areas; for the installation of ceramics, tiles, porcelain, glass mosaics, and similar covering materials in swimming pools, balconies, and terraces, as well as in wet areas like bathrooms and kitchens.

ADVANTAGES

Fast and easy to apply. Highly flexible. Strong adhesion. Labor-friendly. Extended working time. No slipping in vertical applications. Resistant to temperature changes.

CONSUMPTION

• 4 - 6 kg/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO CERAD 2S2 CA 240 W



C2 TE S2

PRODUCT DESCRIPTION

Cement-based, single-component, white-colored, highly flexible ceramic, porcelain, and granite adhesive mortar with reduced slip feature. (C2TE S2)

C2: Cement-based adhesive with additional improved features

T: Reduced slip feature

E: Extended open time

S2: Highly flexible

AREAS OF APPLICATION

Used in all interior and exterior areas of structures, on vertical and horizontal surfaces, in high-traffic and large areas; for the installation of ceramics, tiles, porcelain, glass mosaics, and similar covering materials in swimming pools, balconies, terraces, and wet areas like bathrooms and kitchens.

ADVANTAGES

Fast and easy to apply. Highly flexible. Strong adhesion. Labor-friendly. Extended working time. No slipping in vertical applications. Resistant to temperature changes.

CONSUMPTION

• 4 - 6 kg/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO STONAD SA 245



PRODUCT DESCRIPTION

Cement-based, single-component adhesive for natural and composite stones.

AREAS OF APPLICATION

Used in all interior and exterior areas of structures, on vertical and horizontal surfaces, for the installation of natural and composite stones on all types of surfaces.

ADVANTAGES

Fast and easy to apply. Highly flexible. Strong adhesion. Labor-friendly. Long working time. Fast setting. No slipping in vertical applications. Resistant to temperature changes.

CONSUMPTION

• 4 - 6 kg/m²

STORAGE

- **Packaging:** 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units





JOINT FILLERS

EC 1000 | JF 950 | JF 955 | JN 960

QUADRO EP CERAD EC 1000



PRODUCT DESCRIPTION

Epoxy-based, two-component ceramic adhesive and grout filler.

AREAS OF APPLICATION

Used in all interior and exterior areas of structures, on vertical and horizontal surfaces, in wet areas like bathrooms, toilets, and kitchens; for the installation and grouting of covering materials such as ceramics, tiles, and mosaics.

ADVANTAGES

Fast and easy to apply. Flexible. Strong adhesion. Suitable for large-sized ceramics. No slipping in vertical applications. Resistant to temperature changes. Suitable for heavy traffic.

CONSUMPTION

• 4 - 6 kg/m²

STORAGE

- **Packaging:** 5 kg + 0,2 kg set
- **Pallet size:** 100*100
- **Number of sets per pallet:** 48 units



QUADRO JOINT F JF 950



PRODUCT DESCRIPTION

Cement-based, single-component, flexible grout filler resistant to wear, used in joints ranging from 1-6mm.

AREAS OF APPLICATION

Used in all interior and exterior areas of structures, on vertical and horizontal surfaces, in wet areas like bathrooms, toilets, and kitchens; for the grouting of covering materials such as ceramics, tiles, and mosaics.

ADVANTAGES

Fast and easy to apply. Flexible. Strong adhesion. Resistant to wear. Suitable for large-sized ceramics. Resistant to temperature changes. Can be used in joints ranging from 1-6mm.

CONSUMPTION

• Variable

STORAGE

- **Packaging:** 5 kg kraft bag - 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO JOINT JF 955



PRODUCT DESCRIPTION

Cement-based, single-component, wear-resistant grout filler used in joints ranging from 1-6mm.

AREAS OF APPLICATION

Used in all interior and exterior areas of structures, on vertical and horizontal surfaces, in wet areas like bathrooms, toilets, and kitchens; for the grouting of covering materials such as ceramics, tiles, and mosaics.

ADVANTAGES

Fast and easy to apply. Strong adhesion. Wear-resistant. Suitable for large-sized ceramics. Resistant to temperature changes. Can be used in joints ranging from 1-6mm.

CONSUMPTION

- Variable

STORAGE

- **Packaging:** 5 kg kraft bag - 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



QUADRO JOINT NS JN 960



PRODUCT DESCRIPTION

Cement-based, single-component grout filler used in joints ranging from 3-20mm for natural and composite stone cladding.

AREAS OF APPLICATION

Used in all interior and exterior areas of structures, on vertical and horizontal surfaces, for the grouting of natural and composite stone cladding materials.

ADVANTAGES

Fast and easy to apply. Strong adhesion. Wear-resistant. Resistant to temperature changes. Suitable for contact with drinking water. Used in joints ranging from 3-20mm.


CONSUMPTION

- Variable

STORAGE

- **Packaging:** 5 kg kraft bag - 25 kg kraft bag
- **Pallet size:** 100*100
- **Number of bags per pallet:** 64 units



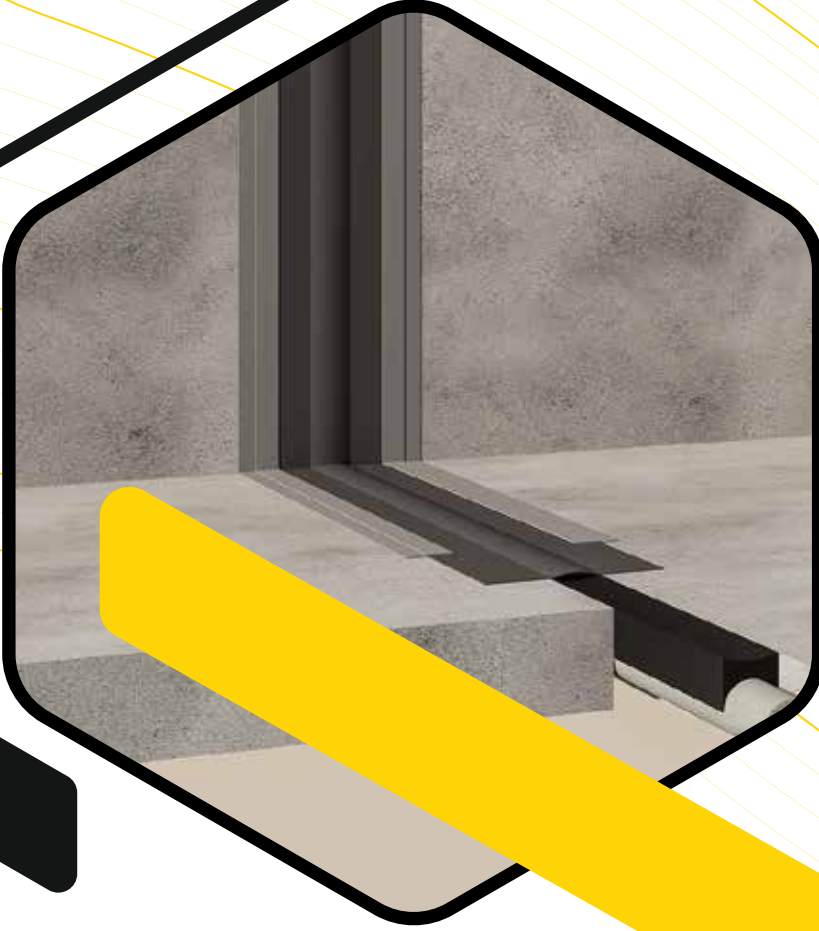

ACCESSORIES

QUADRO DILETASTON 200 DB 5200



PRODUCT DESCRIPTION

An FPO-based expansion joint band used for sealing construction joints, expansion gaps, and in water insulation.

AREAS OF APPLICATION

It is used in all types of underground and aboveground structures, in dynamic cracks, construction joints, and expansion gaps to handle the movements in these areas, together with coating and waterproofing materials.

ADVANTAGES

Ready for use and easy to apply.
Provides continuous water insulation.
Resistant to temperature changes.
High tear resistance.

CONSUMPTION

• To determine the total amount to be applied, a 10% overlap margin should be considered. A 2-3% error margin should be added to the measurement based on the project conditions.

STORAGE

- **Packaging:** Width 1m - Length 25m
- **Pallet size:** 100*100
- **Number of items per pallet:** 64 units



QUADRO EXPANDING 5X20 EB 5520



PRODUCT DESCRIPTION

A sealing band that swells upon contact with water, filling cracks and gaps to ensure water impermeability.

AREAS OF APPLICATION

It is used in all structures, cold joints in walls and foundations, tunnels, pools, water tanks, water treatment facilities, and at the entrances and exits of PVC pipes as a water-stopping band.

ADVANTAGES

Ready for use and easy to apply. When in contact with water, it swells at an ideal rate, preventing any damage to the concrete. Provides long-term protection. Can expand up to 70%. Thanks to its structure, it is not affected by volume changes caused by the freezing of water that has entered inside.

CONSUMPTION

- 1 meter per meter

STORAGE

- **Packaging:** 10 m roll
- **Pallet size:** 100*100
- **Number of items per pallet:** 64 units



QUADRO PAH BANT PB 5500



PRODUCT DESCRIPTION

A waterproofing band used in wall corners, floor-wall connections, and cracks.

AREAS OF APPLICATION

Used as a waterproofing band in all structural joints and expansion areas, as well as in cracks.

ADVANTAGES

Ready for use and easy to apply.
Economical.
High chemical resistance.
Adheres well to waterproofing products.

CONSUMPTION

• 1 meter per meter

STORAGE

- **Packaging:** 50 m roll
- **Pallet size:** 100*100
- **Number of items per pallet:** 64 units



QUADRO FIX BAND FB 5560



PRODUCT DESCRIPTION

A self-adhesive band used for waterproofing in wall corners, floor-wall connections, and cracks.

AREAS OF APPLICATION

Used as a waterproofing band in all structural joints and expansion areas, as well as in cracks.

ADVANTAGES

Ready for use and easy to apply.
Economical.
High chemical resistance.
Self-adhesive.

CONSUMPTION

• 1 meter per meter

STORAGE

- **Packaging:** 20 m roll
- **Pallet size:** 100*100
- **Number of items per pallet:** 64 units



QUADRO ULTRA BANT UB 5500



PRODUCT DESCRIPTION

A super flexible band that provides waterproofing used in wall corners, floor-wall connections, and cracks.

AREAS OF APPLICATION

Used as a waterproofing band in all structural joints and expansion areas, as well as in cracks.

ADVANTAGES

Ready for use and easy to apply.
Highly flexible.
Economical.
High chemical resistance.
Self-adhesive.

CONSUMPTION

• 1 meter per meter

STORAGE

- **Packaging:** 50 m roll
- **Pallet size:** 100*100
- **Number of items per pallet:** 64 units



ADHESIVE PRODUCTS											
PRODUCTS		CA 220	CA 225	CA 225 W	CA 235	CA 235 W	CA 240	CA 240 W	SA 245	EC 1000	TA 640
		QUADRO CERAD 1	QUADRO CERAD 2	QUADRO CERAD 2 W	QUADRO CERAD 2 S	QUADRO CERAD 2 S W	QUADRO CERAD 2S2	QUADRO CERAD 2S2 W	QUADRO STONAD	QUADRO EP CERAD	QUADRO THERMO Y
AREAS OF USE	Interior Floor	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Interior Wall	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Exterior Floor	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Exterior Wall		✓	✓	✓	✓	✓	✓	✓	✓	✓
TYPES OF COATING	Porcelain		✓	✓	✓	✓	✓	✓		✓	
	Granite		✓	✓	✓	✓	✓	✓		✓	
	Natural Stone		✓	✓	✓	✓	✓	✓	✓	✓	
	Marble		✓	✓	✓	✓	✓	✓		✓	
	Floor Ceramic	✓	✓	✓	✓	✓	✓	✓		✓	
	Wall Ceramic	✓	✓	✓	✓	✓	✓	✓		✓	
	Glass Brick	✓	✓	✓	✓	✓	✓	✓		✓	
	Glass Mosaic		✓	✓	✓	✓	✓	✓		✓	
	Thermal Insulation Board										✓
CERAMIC SIZE	Ceramics up to 1100 cm ²	✓	✓	✓	✓	✓	✓	✓		✓	
	Ceramics up to 1800 cm ²		✓	✓	✓	✓	✓	✓		✓	
	Ceramics up to 3600 cm ²				✓	✓	✓	✓		✓	
	Ceramics up to 6400 cm ²						✓	✓		✓	
	Ceramics larger than 6400 cm ²						✓	✓		✓	
APPLICATION SURFACES	Areas with Heavy Pedestrian and Vehicle Traffic		✓	✓	✓	✓	✓	✓		✓	
	Wet Areas	✓	✓	✓	✓	✓	✓	✓		✓	
	Systems with Underfloor Heating			✓	✓	✓	✓	✓		✓	
	Industrial Floors		✓	✓	✓	✓	✓	✓		✓	
	Parking Lots, Terminals, Metro Areas with Heavy Work Activity				✓	✓	✓	✓		✓	
	Water Tanks				✓	✓	✓	✓		✓	
	Swimming Pool				✓	✓	✓	✓		✓	

JOINT FILLERS					
PRODUCTS		EC 1000	JF 950	JF 955	JN 60
		QUADRO EP CERAD	QUADRO JOINT F	QUADRO JOINT	QUADRO JOINT NS
USAGE AREAS	Interior Floor	✓	✓	✓	✓
	Interior Wall	✓	✓	✓	✓
	Exterior Floor	✓		✓	✓
	Exterior Wall	✓		✓	✓
TYPES OF COATING	Porcelain	✓		✓	
	Granite	✓	✓	✓	
	Natural Stone	✓	✓	✓	✓
	Marble	✓	✓	✓	
	Floor Ceramic	✓	✓	✓	
	Wall Ceramic	✓	✓	✓	
	Glass Mosaic	✓		✓	
	Decorative Brick				✓
	Metal	✓			
	FEATURES	Water and Frost Resistance	✓	✓	✓
High Abrasion Resistance		✓		✓	✓
Extra Water Repellent Feature					
APPLICATION SURFACES	Areas with Heavy Pedestrian and Vehicle Traffic	✓			
	Wet Areas	✓		✓	
	Systems with Underfloor Heating	✓		✓	
	Industrial Floors	✓			
	Parking Lots, Terminals, Metro Areas with Heavy Work Activity	✓			
	Water Tanks	✓			
	Decorative Coatings				✓
	Swimming Pool	✓			

EXTERIOR WALL PRODUCTS							
PRODUCTS		TG 655	TL 650	TP 645	SX 680	WC 685	CO 690
		QUADRO THERMO T	QUADRO THERMO C	QUADRO THERMO S	QUADRO SILOX	QUADRO WP COAT	QUADRO COAT
USAGE AREAS	Interior Wall			✓			
	Exterior Wall	✓	✓	✓	✓	✓	✓
APPLICATION AREAS	Paintable Surface	✓	✓	✓	✓		
	Decorative Appearance	✓	✓			✓	✓
	Grain Textured	✓					
	Line Textured		✓				
	Top Coat Paint						✓
	Waterproofing Coating					✓	
	Water-Repellent Coating				✓	✓	
	Thermal Insulation Plaster			✓			
APPLICATION SURFACES	Concrete Surface	✓	✓	✓	✓	✓	✓
	Stone Surface				✓	✓	
	Thermal Insulation Board			✓			
	Plastered Surface	✓	✓	✓	✓	✓	✓

MORTAR ADDITIVES								
PRODUCTS		WP 1100	LX 1200	CL 2000	CP 2020	LL 1560	MS 1540	PC 1550
		QUADRO WP	QUADRO LATEX	QUADRO CRISTAL LIQUID	QUADRO CRISTAL POWDER	QUADRO LIQUID LIME	QUADRO PLASTICIER	QUADRO PLASTICIER H
APPLICATION AREAS	Helps Improve Waterproofing Properties	✓	✓	✓	✓			
	Enhances the Adhesion of the Applied Mortar		✓					
	Gives Waterproofing Properties by Forming Crystals			✓	✓			
	Improves Flow and Workability	✓	✓			✓	✓	✓
APPLICATION SURFACES	Concrete	✓		✓	✓			
	Screed	✓	✓			✓	✓	✓
	Cement-Based Mortars	✓	✓			✓	✓	✓



A series of horizontal dashed lines spanning the width of the page, intended for writing or drawing.





Taşpınar Mah. Teknosab
20. Cadde No: 17
Karacabey/BURSA TÜRKİYE

Eskişehir Organize Sanayi Bölgesi
75. Yıl Mah. 50. Cadde No:19
Odunpazarı/ESKİŞEHİR TÜRKİYE



www.epsa.com.tr
www.quadroflex.com.tr



info@epsa.com.tr

 **+90 224 384 10 20**
Customer Contact Center •••

